

NUDURA 6"
(152mm)
STANDARD FORM
UNIT

BRICK VENEER
c/w 1" (25mm)
AIR SPACE AND
BRICK TIES

THROUGH WALL
FLASHING AS
PER CODE OR
AS SPECIFIED

FIRE CAULK APPLIED
TO BACKSIDE OF
STEEL LINTEL BEFORE
INSTALLATION

STEEL LINTEL

FOAM BACKER
ROD AND
CONTINUOUS
CAULKING
AROUND FRAME
TO MASONRY

WINDOW FRAMING
BY OTHERS

1/2" (13mm)
GYPSUM BOARD


HORIZ/VERT
REINFORCEMENT
AS PER CODE OR
AS SPECIFIED

LINTEL
REINFORCEMENT
AS PER CODE OR
AS SPECIFIED

1 1/2"
(38mm) MIN.
COVER

GYPSUM BOARD
RETURN TO FRAME

VAPOR BARRIER
c/w FOAM
ROD/CAULK TO
SEAL TO INTERIOR
EDGE OF FRAME

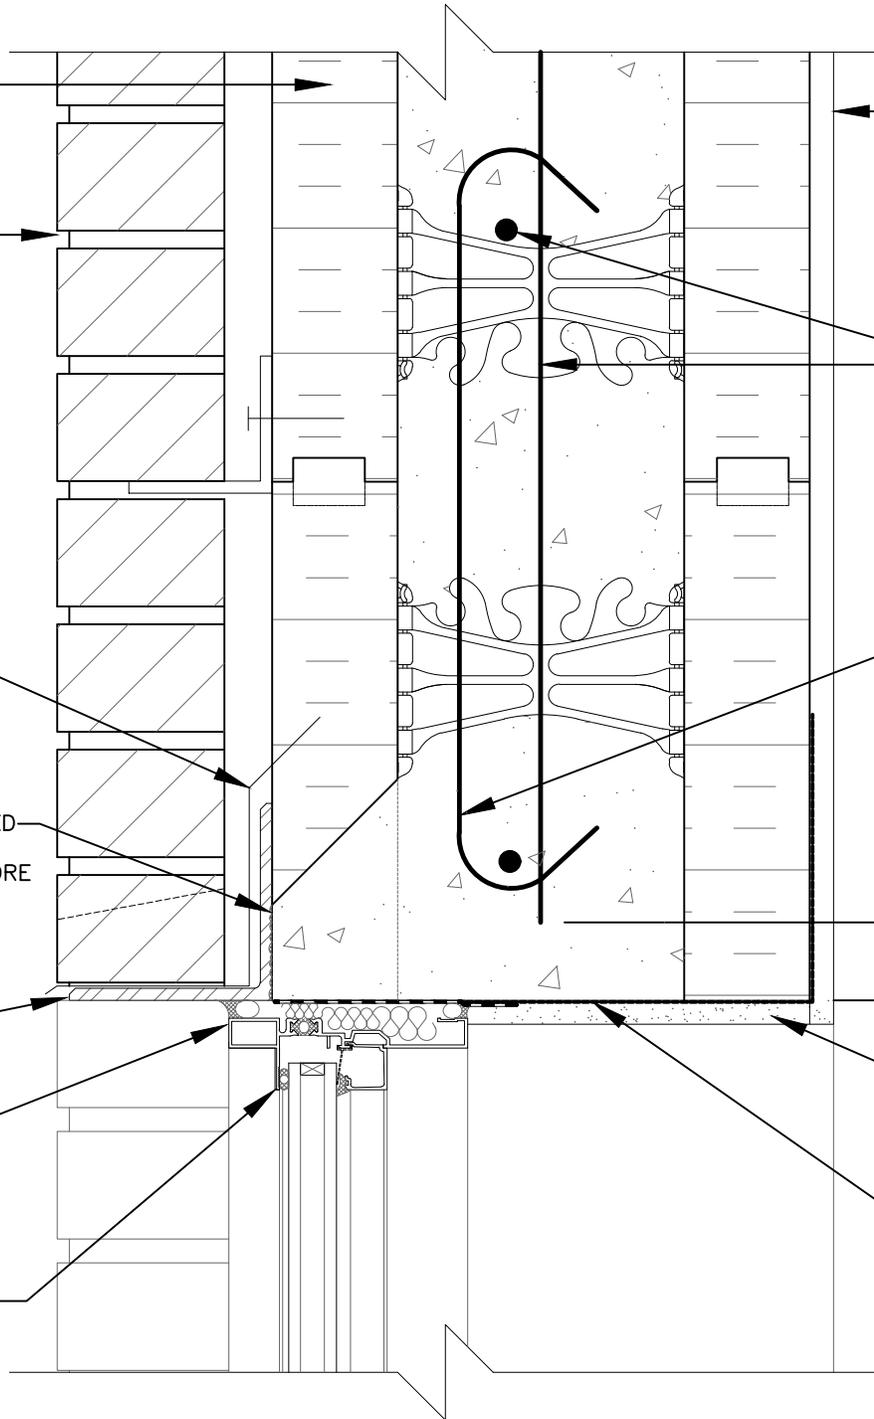

The architecture, engineering, and design of the project using the Nudura products are the responsibility of the project's design professional. All products and systems must comply with local building codes and standards. This detail is for general information and guidance only and Nudura specifically disclaims any liability for the use of this detail. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project. This detail is subject to change without notice. Contact Nudura to ensure you have the most recent version.

Non-Combustible Construction

Detail: Nudura 6" (152mm) Form Unit, Window Head Detail,
For Loose Fit Steel Lintel, Compliant Openings, Brick Veneer Finish

File Name:

Drawn by: KS

Scale: 1 : 4

Date: 12/28/2021

H6A04A



Nudura Technical Support: 866-468-6299
International: +1 705-726-9499



Construction Products Group

tremcocpg.com