

FLASHING AS SPECIFIED

WOOD BLOCKING AND PLYWOOD AT 5° SLOPE

NON-COMBUSTIBLE FIBERGLASS BATT INSULATION ON VAPOR BARRIER

EPS CANT STRIP

BRICK VENEER c/w 1" (25mm) AIR SPACE AND BRICK TIES

FIBER BOARD SUBSTRATE w/ ROOF MEMBRANE ON 3 1/2" (89mm) RIGID INSULATION

V-CLIP WALL PANEL ANCHOR

FORM PANELS c/w INSERT WEBS-CUT TO SUIT ROOF CONNECTION-ADDITIONAL FORM SUPPORT AS REQUIRED

HOLLOW CORE PRECAST SLAB

MASONITE BEARING PAD

FINISH AS SPECIFIED


WET SET DOWELS TO MATCH VERTICAL REINFORCEMENT BETWEEN POUR OR AS SPECIFIED

DOWELS FIELD BENT AND GROUDED INTO SHEAR KEY JOINT BETWEEN PANELS AS SPECIFIED

HORIZ/VERT REINFORCEMENT AS PER CODE OR AS SPECIFIED

1/2" (13mm) GYPSUM BOARD

NUDURA 6" (152mm) STANDARD FORM UNIT

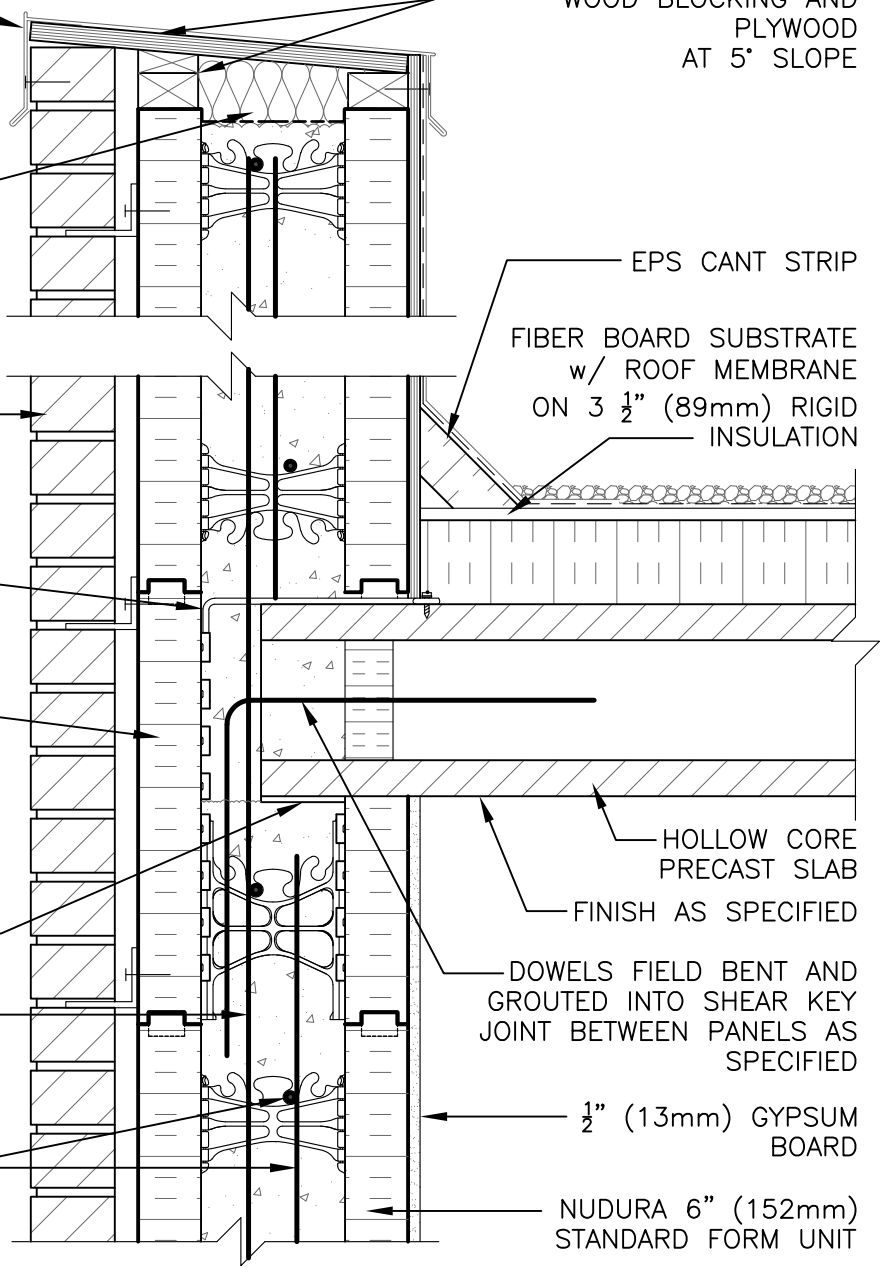

DISCLAIMER NOTICE:
 SPECIFIC INFORMATION
 REQUIRED FOR COMPLIANCE
 WITH LOCAL CODES IS THE
 RESPONSIBILITY OF THE
 DESIGNER



NUDURA 6" (152mm) FORM UNIT
 HOLLOW CORE PRECAST ROOF
 EXTERIOR BEARING WALL DETAIL
 BRICK VENEER FINISH

REV. NO. 004 KS	DWG NO. F6E02
REV. DATE: APRIL 2010	
DRAWN BY: T. VAN CLIEAF	SCALE: 1 : 8