

BRICK VENEER w/ 1" (25mm) CAVITY AND BRICK TIES AS PER CODE

TREMCO EXOAIR 230, ENVIRODRI OR FUNCTIONAL EQUIVALENT

NUDURA 6" (152mm) STANDARD FORM UNIT

WEEP HOLES AND THROUGH WALL FLASHING AS PER CODE OR AS SPECIFIED

STEEL LINTEL

CONTINUOUS CAULKING AROUND FRAME AT CONTACT TO MASONRY

SILL PAN (OPTIONAL) INSTALL WINDOW UNIT AND ASSOCIATED FLASHINGS PER MANUFACTURER'S RECOMMENDATIONS, CODE REQUIREMENTS AND PROJECT DOCUMENTS

OPENING REINFORCEMENT AS PER CODE OR AS SPECIFIED

MIN 1/2" (13mm) GYPSUM BOARD

HORIZ/VERT REINFORCEMENT AS PER CODE OR AS SPECIFIED (SEE NOTE 1)

LINTEL REINFORCEMENT AS PER CODE OR AS SPECIFIED

EXOAIR 110AT, DYMONIC 100 OR FUNCTIONAL EQUIVALENT 3" (76 mm) MIN. ON EPS BOTH SIDES (SEE NOTE 2)

1 1/2" (38mm) MIN. COVER

ENGINEERED FRAMING SYSTEM BY PREBUCK LLC OR FUNCTIONAL EQUIVALENT

CUTOUT FOR CONCRETE PLACEMENT AND CONSOLIDATION

SILL EXTENSION TRIM

EXOAIR 110AT, DYMONIC 100 OR FUNCTIONAL EQUIVALENT, LAPPED & SEALED TO WINDOW FRAME (OR SILL PAN) (SEE NOTE 2)

MIN 1/2" (13mm) GYPSUM BOARD

NOTES:

1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*

**Combustible Construction - Doors and Windows**



Detail: Nudura 6" (152mm) Form Unit, Window Head/Sill Detail,  
Brick Veneer Finish, Inset Wood Rough Buck

Drawn by: KS

Checked by: KS

Scale: 1:8

Revision #: 01

Revised by: KAB

Date: 3/13/2024

File Name:

E6A01



OPENING REINFORCEMENT AS PER CODE OR AS SPECIFIED

MIN 1/2" (13mm) GYPSUM BOARD

1 1/2"  
(38mm) MIN.  
COVER

NUDURA 6" (152mm)  
STANDARD FORM UNIT

EXOAIR 110AT, DYMONIC 100  
OR FUNCTIONAL EQUIVALENT  
3" (76 mm) MIN. ON EPS BOTH  
SIDES (SEE NOTE 2)

JAMB EXTENSION OR GYPSUM  
BOARD RETURN

ENGINEERED FRAMING SYSTEM  
BY PREBUCK LLC OR FUNCTIONAL  
EQUIVALENT

CONTINUOUS CAULKING AROUND  
FRAME AT CONTACT TO MASONRY

HORIZ/VERT REINFORCEMENT  
AS PER CODE OR AS SPECIFIED  
(SEE NOTE 1)

BRICK VENEER c/w 1" (25mm)  
AIR SPACE AND BRICK TIES

EXOAIR 110AT, DYMONIC 100 OR  
FUNCTIONAL EQUIVALENT  
SEALED TO EPS FOAM BEHIND  
FINISH AS PER CODE OR AS  
SPECIFIED

TREMCO EXOAIR 230,  
ENVIRODRI OR FUNCTIONAL  
EQUIVALENT

NOTES:

1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*

**Combustible Construction - Doors and Windows**



Nudura Technical Support: 866-468-6299  
International: +1 705-726-9499

Detail: Nudura 6" (152mm) Form Unit, Window Jamb Detail, Inset Wood Rough Buck, Brick Veneer Finish

Drawn by: KS

Checked by: KS

Scale: 1:8

Revision #: 01

Revised by: KAB

Date: 3/13/2024

File Name:

E6A02



Construction Products Group

www.tremcocpg.com

BRICK VENEER w/ 1" (25mm) CAVITY AND BRICK TIES AS PER CODE

TREMCO EXOAIR 230, ENVIRODRI OR FUNCTIONAL EQUIVALENT

NUDURA 6" (152mm) STANDARD FORM UNIT

WEEP HOLES AND THROUGH WALL FLASHING AS PER CODE OR AS SPECIFIED

STEEL LINTEL

CONTINUOUS CAULKING AROUND FRAME AT CONTACT TO MASONRY

SILL PAN (OPTIONAL) INSTALL WINDOW UNIT AND ASSOCIATED FLASHINGS PER MANUFACTURER'S RECOMMENDATIONS, CODE REQUIREMENTS AND PROJECT DOCUMENTS

OPENING REINFORCEMENT AS PER CODE OR AS SPECIFIED

MIN 1/2" (13mm) GYPSUM BOARD

HORIZ/VERT REINFORCEMENT AS PER CODE OR AS SPECIFIED (SEE NOTE 1)

LINTEL REINFORCEMENT AS PER CODE OR AS SPECIFIED

EXOAIR 110AT, DYMONIC 100 OR FUNCTIONAL EQUIVALENT 3" (76mm) MIN. ON EPS BOTH SIDES (SEE NOTE 2)

1 1/2" (38mm) MIN. COVER

ENGINEERED FRAMING SYSTEM BY PREBUCK LLC OR FUNCTIONAL EQUIVALENT

SILL EXTENSION TRIM

CUTOUT FOR CONCRETE PLACEMENT AND CONSOLIDATION

EXOAIR 110AT, DYMONIC 100 OR FUNCTIONAL EQUIVALENT, LAPPED & SEALED TO WINDOW FRAME (OR SILL PAN) (SEE NOTE 2)

MIN 1/2" (13mm) GYPSUM BOARD

**NOTES:**

1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*

**Combustible Construction - Doors and Windows**



Detail: Nudura 6" (152mm) Form Unit, Window Head/Sill Detail,  
Brick Veneer Finish, Partial Depth Wood Rough Buck

Drawn by: KS

Checked by: KS

Scale: 1:8

Revision #: 01

Revised by: KAB

Date: 3/13/2024

File Name:

E6A03



BRICK VENEER w/ 1" (25mm) CAVITY AND BRICK TIES AS PER CODE

TREMCO EXOAIR 230, ENVIRODRI OR FUNCTIONAL EQUIVALENT

NUDURA 6" (152mm) STANDARD FORM UNIT

WEEP HOLES AND THROUGH WALL FLASHING AS PER CODE OR AS SPECIFIED

STEEL LINTEL

CONTINUOUS CAULKING AROUND FRAME AT CONTACT TO MASONRY

SILL PAN (OPTIONAL) INSTALL WINDOW UNIT AND ASSOCIATED FLASHINGS PER MANUFACTURER'S RECOMMENDATIONS, CODE REQUIREMENTS AND PROJECT DOCUMENTS

OPENING REINFORCEMENT AS PER CODE OR AS SPECIFIED

MIN 1/2" (13mm) GYPSUM BOARD

HORIZ/VERT REINFORCEMENT AS PER CODE OR AS SPECIFIED (SEE NOTE 1)

LINTEL REINFORCEMENT AS PER CODE OR AS SPECIFIED

EXOAIR 110AT, DYMONIC 100 OR FUNCTIONAL EQUIVALENT 3" (76mm) MIN. ON EPS BOTH SIDES (SEE NOTE 2)


ENGINEERED FRAMING SYSTEM BY PREBUCK LLC OR FUNCTIONAL EQUIVALENT

SILL EXTENSION TRIM

CUTOUT FOR CONCRETE PLACEMENT AND CONSOLIDATION

EXOAIR 110AT, DYMONIC 100 OR FUNCTIONAL EQUIVALENT, LAPPED & SEALED TO WINDOW FRAME (OR SILL PAN) (SEE NOTE 2)

MIN 1/2" (13mm) GYPSUM BOARD

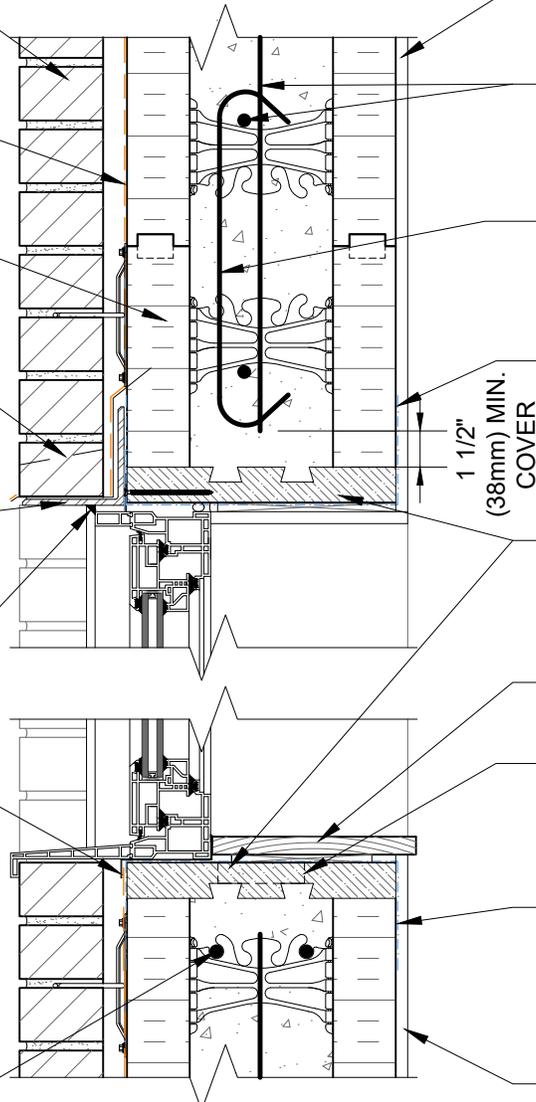

NOTES:

1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*

**Combustible Construction - Doors and Windows**



Detail: Nudura 6" (152mm) Form Unit, Window Head/Sill Detail,  
Brick Veneer Finish, Full Depth Wood Rough Buck

Drawn by: KS

Checked by: KS

Scale: 1:8

Revision #: 01

Revised by: KAB

Date: 3/13/2024

File Name:

E6A04



OPENING REINFORCEMENT AS PER CODE OR AS SPECIFIED

MIN 1/2" (13mm) GYPSUM BOARD

1 1/2"  
(38mm) MIN.  
COVER

NUDURA 6" (152mm)  
STANDARD FORM UNIT

EXOAIR 110AT, DYMONIC 100  
OR FUNCTIONAL EQUIVALENT  
3" (76 mm) MIN. ON EPS BOTH  
SIDES (SEE NOTE 2)

JAMB EXTENSION OR GYPSUM  
BOARD RETURN

ENGINEERED FRAMING SYSTEM  
BY PREBUCK LLC OR FUNCTIONAL  
EQUIVALENT

CONTINUOUS CAULKING AROUND  
FRAME AT CONTACT TO MASONRY

HORIZ/VERT REINFORCEMENT  
AS PER CODE OR AS SPECIFIED  
(SEE NOTE 1)

BRICK VENEER c/w 1" (25mm)  
AIR SPACE AND BRICK TIES

EXOAIR 110AT, DYMONIC 100 OR  
FUNCTIONAL EQUIVALENT  
SEALED TO EPS FOAM BEHIND  
FINISH AS PER CODE OR AS  
SPECIFIED

TREMCO EXOAIR 230,  
ENVIRODRI OR FUNCTIONAL  
EQUIVALENT

- NOTES:
- 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.
  - 2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*

### Combustible Construction - Doors and Windows

Detail: Nudura 6" (152mm) Form Unit, Window Jamb Detail, Partial Depth  
Wood Rough Buck, Brick Veneer Finish

File Name:

Drawn by: KS

Checked by: KS

Scale: 1:8

E6A05

Revision #: 01

Revised by: KAB

Date: 3/13/2024



Nudura Technical Support: 866-468-6299  
International: +1 705-726-9499



Construction Products Group

www.tremcocpg.com

OPENING REINFORCEMENT AS PER CODE OR AS SPECIFIED

MIN 1/2" (13mm) GYPSUM BOARD

1 1/2"  
(38mm) MIN.  
COVER

NUDURA 6" (152mm)  
STANDARD FORM UNIT

EXOAIR 110AT, DYMONIC 100  
OR FUNCTIONAL EQUIVALENT  
3" (76 mm) MIN. ON EPS BOTH  
SIDES (SEE NOTE 2)

JAMB EXTENSION OR  
GYPSUM BOARD RETURN

ENGINEERED FRAMING SYSTEM  
BY PREBUCK LLC OR FUNCTIONAL  
EQUIVALENT

HORIZ/VERT REINFORCEMENT  
AS PER CODE OR AS SPECIFIED  
(SEE NOTE 1)

CONTINUOUS CAULKING AROUND  
FRAME AT CONTACT TO MASONRY

BRICK VENEER c/w 1" (25mm)  
AIR SPACE AND BRICK TIES

EXOAIR 110AT, DYMONIC 100 OR  
FUNCTIONAL EQUIVALENT  
SEALED TO EPS FOAM BEHIND  
FINISH AS PER CODE OR AS  
SPECIFIED

TREMCO EXOAIR 230,  
ENVIRODRI OR FUNCTIONAL  
EQUIVALENT

NOTES:

1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*

**Combustible Construction - Doors and Windows**

Detail: Nudura 6" (152mm) Form Unit, Window Jamb Detail, Full Depth  
Wood Rough Buck, Brick Veneer Finish

File Name:

Drawn by: KS

Checked by: KS

Scale: 1:8

E6A06

Revision #: 01

Revised by: KAB

Date: 3/13/2024



Nudura Technical Support: 866-468-6299  
International: +1 705-726-9499



Construction Products Group

www.tremcocpg.com

EXTERIOR FINISH AS SPECIFIED

TREMCO EXOAIR 230,  
ENVIRODRI OR FUNCTIONAL  
EQUIVALENT

NUDURA 6" (152mm) STANDARD  
FORM UNIT

ENGINEERED FRAMING SYSTEM  
BY PREBUCK LLC OR  
FUNCTIONAL EQUIVALENT

ALUMINUM DRIP CAP FLASHING  
INSTALLED BELOW FINISH FOR  
FULL WIDTH OF FRAME AS PER  
CODE OR AS SPECIFIED

SILL PAN (OPTIONAL) INSTALL  
WINDOW UNIT AND  
ASSOCIATED FLASHINGS PER  
MANUFACTURER'S  
RECOMMENDATIONS, CODE  
REQUIREMENTS AND  
PROJECT DOCUMENTS

OPENING REINFORCEMENT AS  
PER CODE OR AS SPECIFIED

MIN 1/2" (13mm) GYPSUM BOARD

HORIZ/VERT REINFORCEMENT  
AS PER CODE OR AS SPECIFIED  
(SEE NOTE 1)

LINTEL REINFORCEMENT AS  
PER CODE OR AS SPECIFIED

EXOAIR 110AT, DYMONIC 100 OR  
FUNCTIONAL EQUIVALENT 3" (76mm)  
MIN. ON EPS BOTH SIDES  
(SEE NOTE 2)

GYPSUM BOARD RETURN

SILL EXTENSION

CUTOUT FOR CONCRETE  
PLACEMENT AND  
CONSOLIDATION

EXOAIR 110AT, DYMONIC 100 OR  
FUNCTIONAL EQUIVALENT, LAPPED  
& SEALED TO WINDOW FRAME (OR  
SILL PAN) (SEE NOTE 2)

MIN 1/2" (13mm) GYPSUM BOARD

1 1/2"  
(38mm) MIN.  
COVER

NOTES:

1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM,  
SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18"  
(457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT  
MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT  
PLACEMENT DETAILS.

2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND  
COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA  
APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE  
CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*

Combustible Construction - Doors and Windows

Detail: Nudura 6" (152mm) Form Unit, Window Head/Sill Detail,  
Exterior Finish as Specified, Inset Wood Rough Buck

File Name:

Drawn by: KS

Checked by: KS

Scale: 1:8

E6C01

Revision #: 01

Revised by: KAB

Date: 3/13/2024



Nudura Technical Support: 866-468-6299  
International: +1 705-726-9499



Construction Products Group

www.tremcocpg.com

OPENING REINFORCEMENT AS PER CODE OR AS SPECIFIED

MIN 1/2" (13mm) GYPSUM BOARD

1 1/2"  
(38mm) MIN.  
COVER

NUDURA 6" (152mm)  
STANDARD FORM UNIT

EXOAIR 110AT, DYMONIC 100  
OR FUNCTIONAL EQUIVALENT  
3" (76 mm) MIN. ON EPS BOTH  
SIDES (SEE NOTE 2)

JAMB EXTENSION OR  
GYPSUM BOARD RETURN


ENGINEERED FRAMING SYSTEM  
BY PREBUCK LLC OR FUNCTIONAL  
EQUIVALENT

EXOAIR 110AT, DYMONIC 100 OR  
FUNCTIONAL EQUIVALENT  
SEALED TO EPS FOAM BEHIND  
FINISH AS PER CODE OR AS  
SPECIFIED

HORIZ/VERT REINFORCEMENT  
AS PER CODE OR AS SPECIFIED  
(SEE NOTE 1)

EXTERIOR FINISH AS  
SPECIFIED

TREMCO EXOAIR 230,  
ENVIRODRI OR FUNCTIONAL  
EQUIVALENT

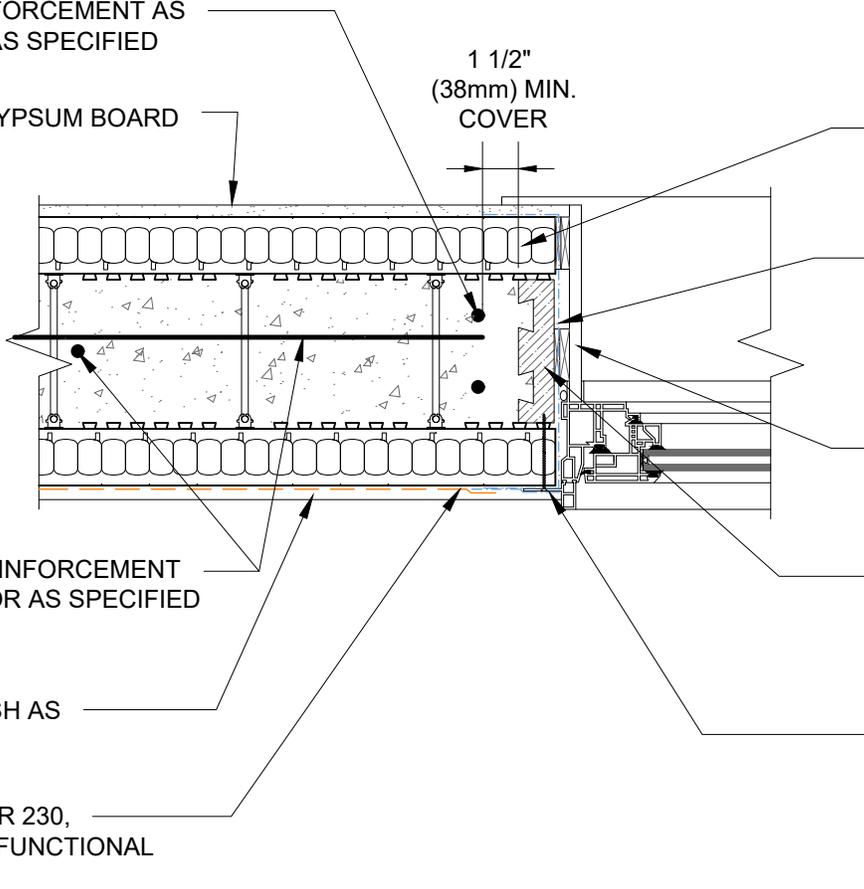

NOTES:

1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*

**Combustible Construction - Doors and Windows**

Detail: Nudura 6" (152mm) Form Unit, Window Jamb Detail, Inset Wood Rough Buck, Exterior Finish as Specified			File Name:
Drawn by: KS	Checked by: KS	Scale: 1:8	E6C02
Revision #: 01	Revised by: KAB	Date: 3/13/2024	




Nudura Technical Support: 866-468-6299  
International: +1 705-726-9499



Construction Products Group

www.tremcocpg.com

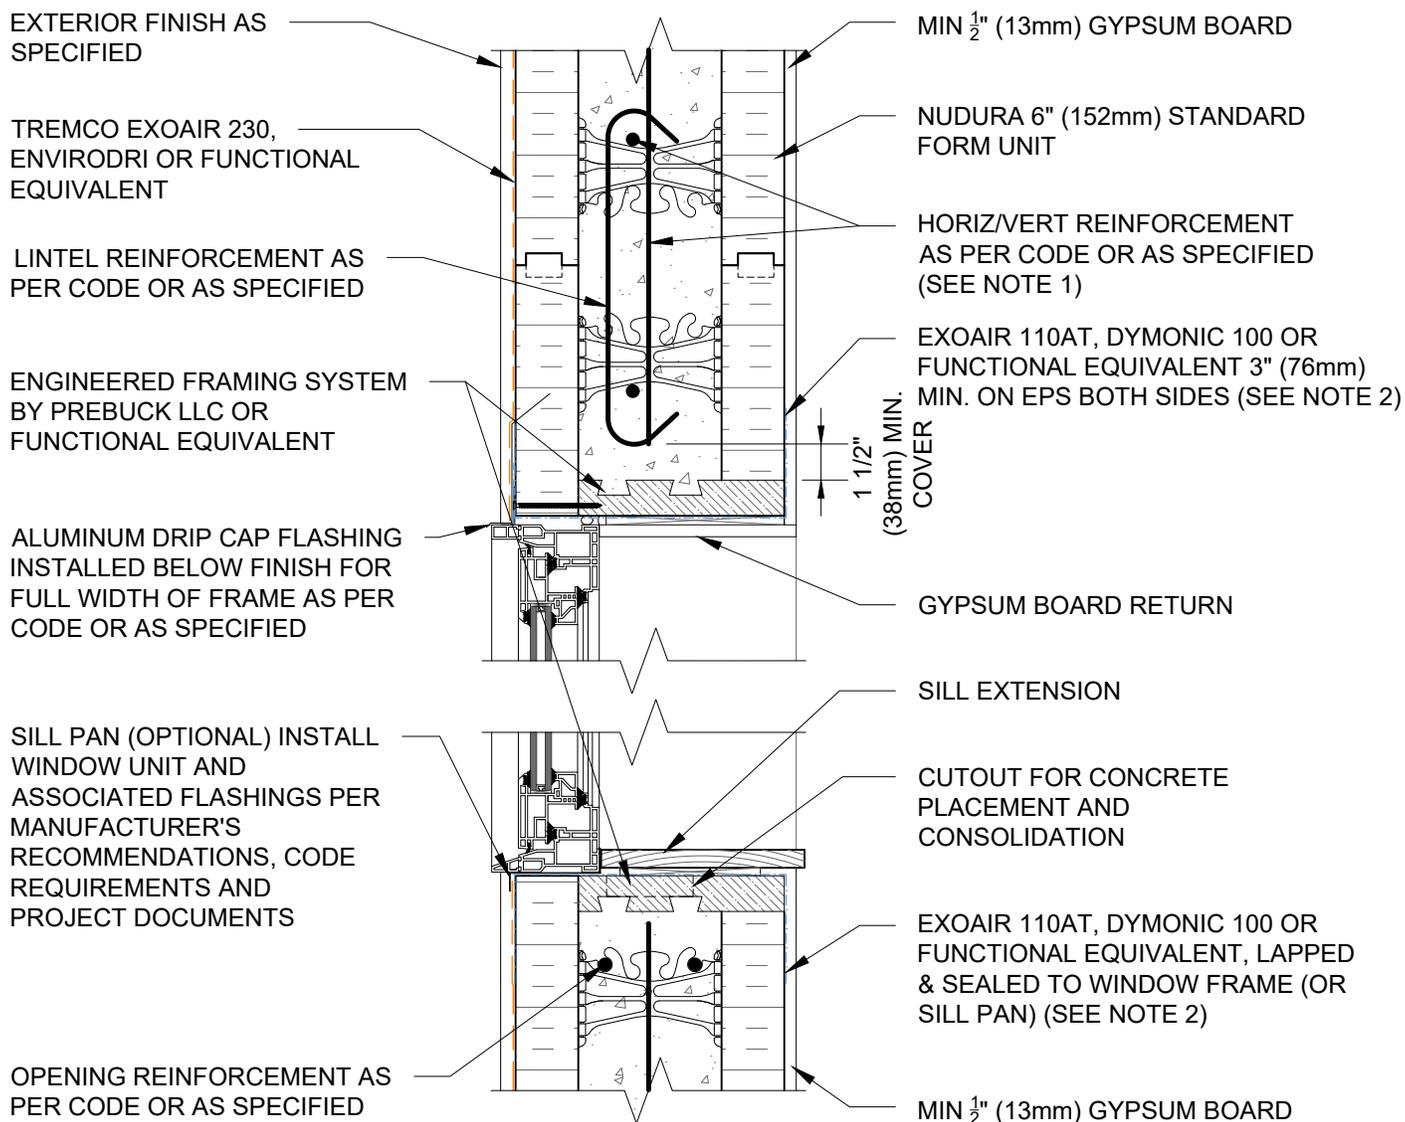

- NOTES:
- 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.
  - 2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*


### Combustible Construction - Doors and Windows



Detail: Nudura 6" (152mm) Form Unit, Window Head/Sill Detail, Exterior Finish as Specified, Partial Depth Wood Rough Buck			File Name:
Drawn by: KS	Checked by: KS	Scale: 1:8	E6C03
Revision #: 01	Revised by: KAB	Date: 3/13/2024	

www.tremcocpg.com



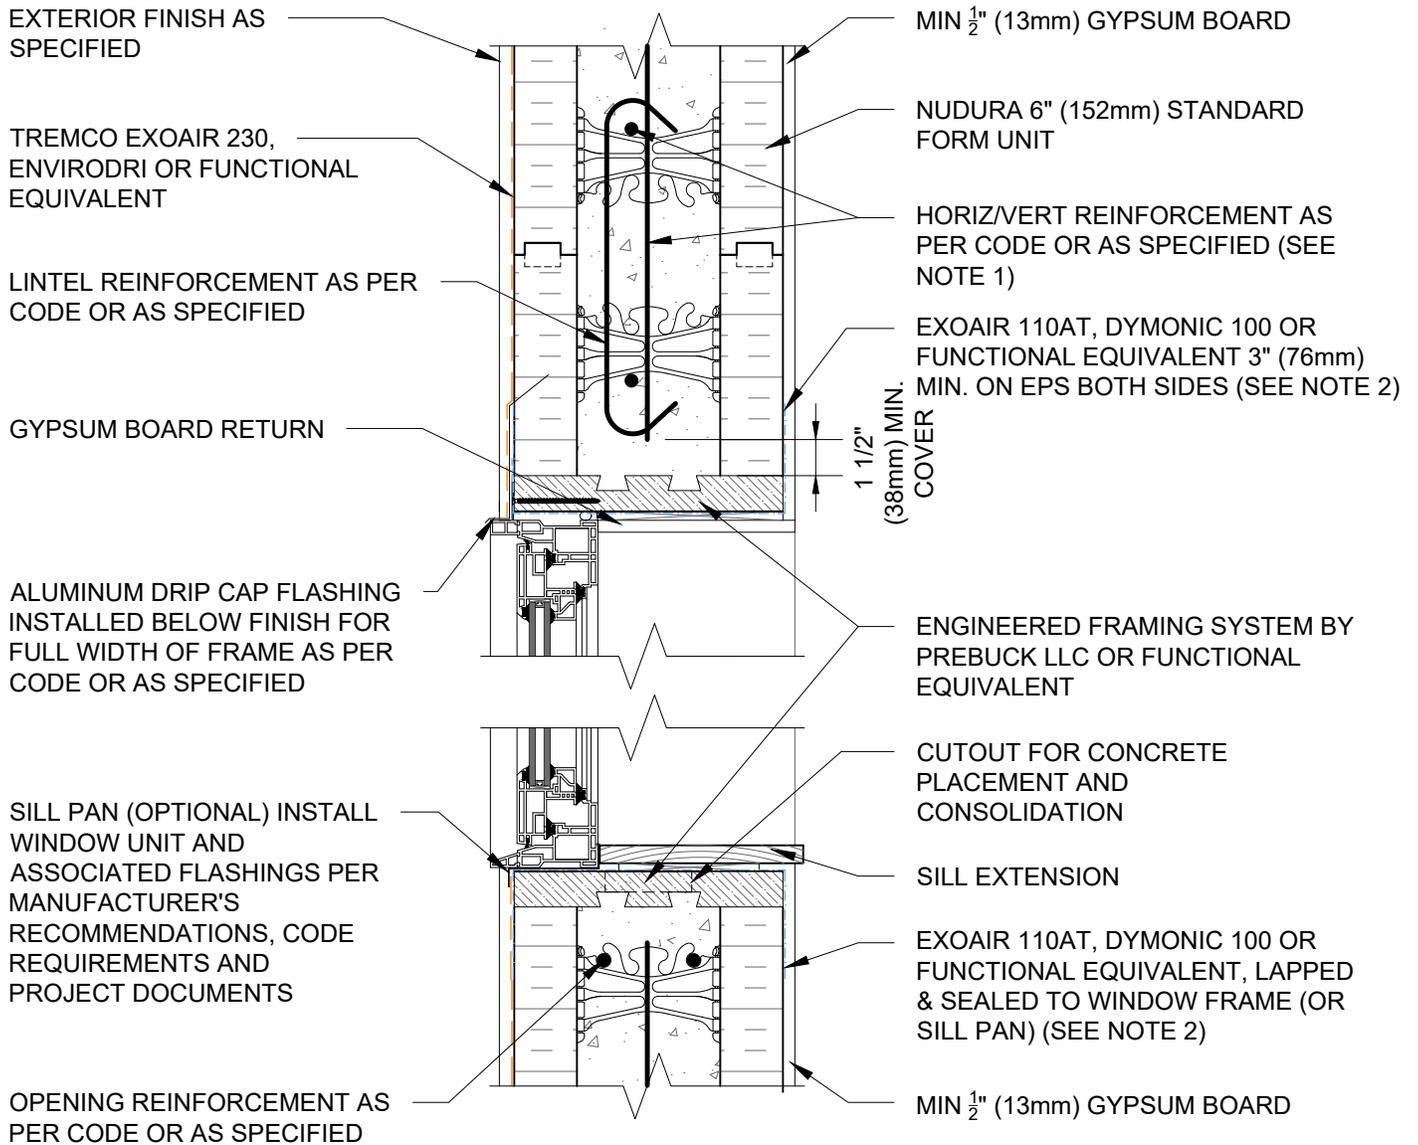

- NOTES:
- 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.
  - 2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*

**Combustible Construction - Doors and Windows**



Detail: Nudura 6" (152mm) Form Unit, Window Head/Sill Detail, Exterior Finish as Specified, Full Depth Wood Rough Buck			File Name:
Drawn by: KS	Checked by: KS	Scale: 1:8	E6C04
Revision #: 01	Revised by: KAB	Date: 3/13/2024	



OPENING REINFORCEMENT AS PER CODE OR AS SPECIFIED

MIN 1/2" (13mm) GYPSUM BOARD

1 1/2"  
(38mm) MIN.  
COVER

NUDURA 6" (152mm)  
STANDARD FORM UNIT

EXOAIR 110AT, DYMONIC 100  
OR FUNCTIONAL EQUIVALENT  
3" (76 mm) MIN. ON EPS BOTH  
SIDES (SEE NOTE 2)

JAMB EXTENSION OR GYPSUM  
BOARD RETURN

HORIZ/VERT REINFORCEMENT  
AS PER CODE OR AS SPECIFIED  
(SEE NOTE 1)

ENGINEERED FRAMING SYSTEM  
BY PREBUCK LLC OR FUNCTIONAL  
EQUIVALENT

EXTERIOR FINISH AS  
SPECIFIED

EXOAIR 110AT, DYMONIC 100 OR  
FUNCTIONAL EQUIVALENT  
SEALED TO EPS FOAM BEHIND  
FINISH AS PER CODE OR AS  
SPECIFIED

TREMCO EXOAIR 230,  
ENVIRODRI OR FUNCTIONAL  
EQUIVALENT

NOTES:

1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*

**Combustible Construction - Doors and Windows**

Detail: Nudura 6" (152mm) Form Unit, Window Jamb Detail, Partial Depth  
Wood Rough Buck, Exterior Finish as Specified

File Name:

Drawn by: KS

Checked by: KS

Scale: 1:8

E6C05

Revision #: 01

Revised by: KAB

Date: 3/13/2024



Nudura Technical Support: 866-468-6299  
International: +1 705-726-9499



Construction Products Group

www.tremcocpg.com

OPENING REINFORCEMENT AS PER CODE OR AS SPECIFIED

MIN 1/2" (13mm) GYPSUM BOARD

1 1/2"  
(38mm) MIN.  
COVER

NUDURA 6" (152mm)  
STANDARD FORM UNIT

EXOAIR 110AT, DYMONIC 100  
OR FUNCTIONAL EQUIVALENT  
3" (76 mm) MIN. ON EPS BOTH  
SIDES (SEE NOTE 2)

JAMB EXTENSION OR  
GYPSUM BOARD RETURN


HORIZ/VERT REINFORCEMENT  
AS PER CODE OR AS SPECIFIED  
(SEE NOTE 1)

ENGINEERED FRAMING SYSTEM  
BY PREBUCK LLC OR FUNCTIONAL  
EQUIVALENT

EXTERIOR FINISH AS  
SPECIFIED

EXOAIR 110AT, DYMONIC 100 OR  
FUNCTIONAL EQUIVALENT  
SEALED TO EPS FOAM BEHIND  
FINISH AS PER CODE OR AS  
SPECIFIED

TREMCO EXOAIR 230,  
ENVIRODRI OR FUNCTIONAL  
EQUIVALENT

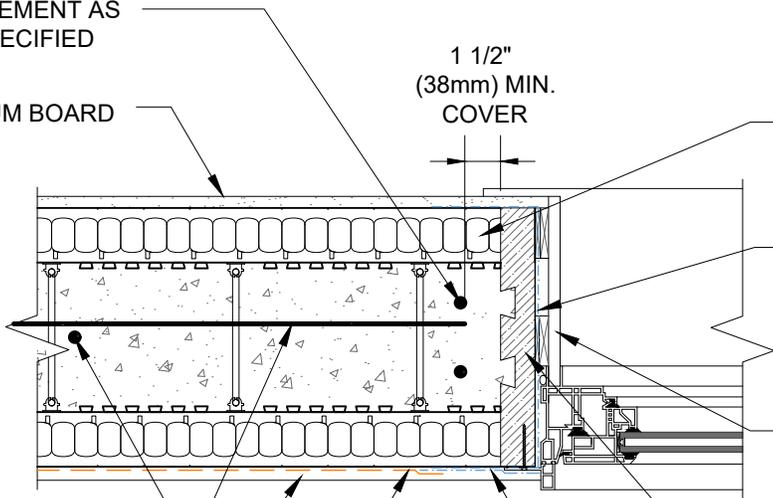

NOTES:

1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

2) AIR BARRIER/DRAINAGE FLASHINGS TO BE INSTALLED AROUND COMPLETE OPENING PERIMETER AS PER TREMCO/NUDURA APPLICATION INSTRUCTIONS OR AS DETAILED BY LOCAL APPLICABLE CODES (CODE GOVERNS)

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. and Prebuck, LLC from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco and Prebuck to ensure you have the most recent version.*

**Combustible Construction - Doors and Windows**

Detail: Nudura 6" (152mm) Form Unit, Window Jamb Detail, Full Depth Wood  
Rough Buck, Exterior Finish as Specified

File Name:

Drawn by: KS

Checked by: KS

Scale: 1:8

E6C06

Revision #: 01

Revised by: KAB

Date: 3/13/2024




Nudura Technical Support: 866-468-6299  
International: +1 705-726-9499



Construction Products Group

www.tremcocpg.com

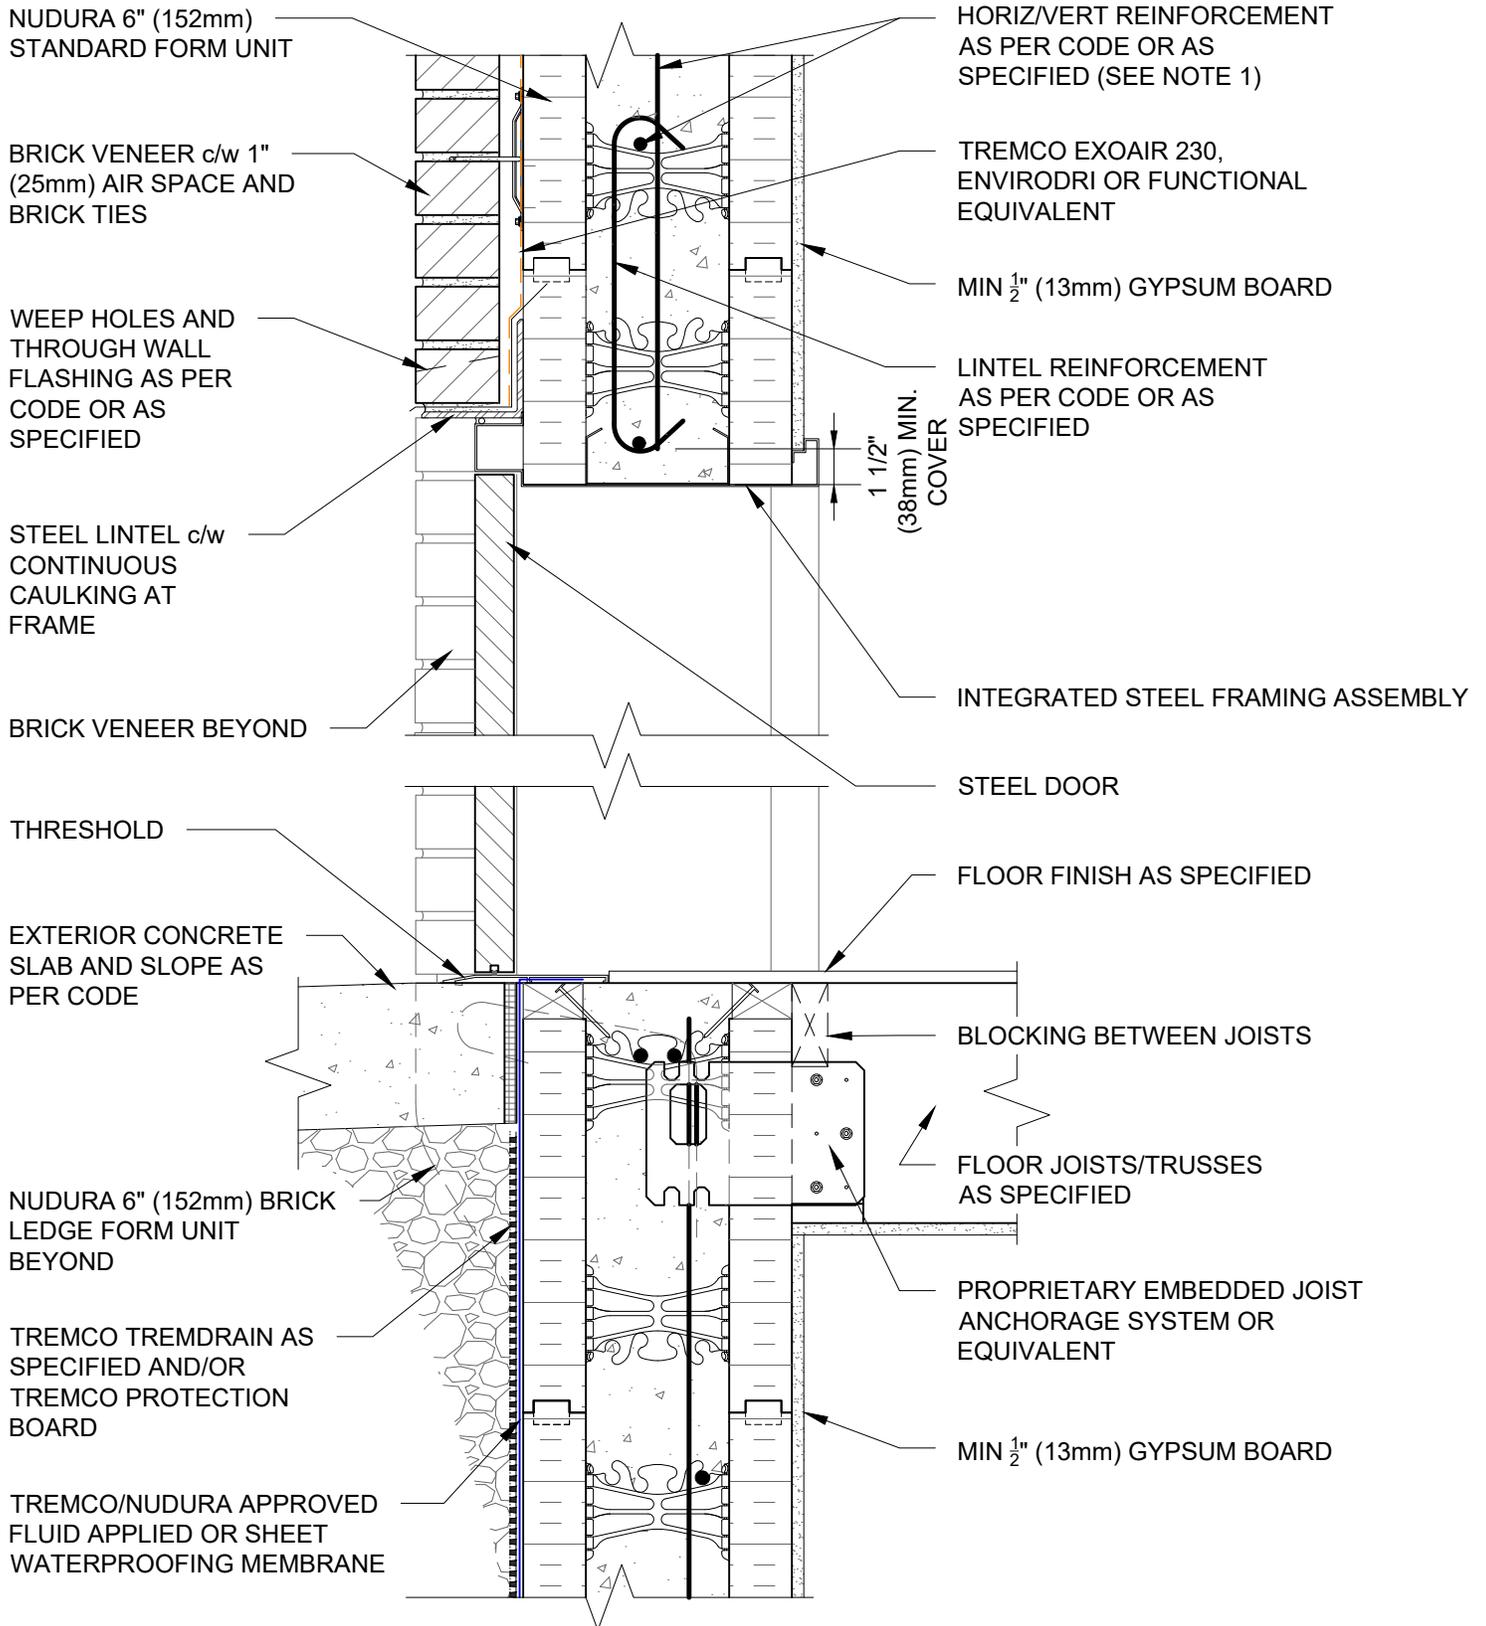

**NOTES:**

1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

*This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.*


**Combustible Construction - Doors and Windows**



Detail: Nudura 6" (152mm) Form Unit, Door Head/Sill Detail, Brick Veneer Finish, Wood Rough Buck			File Name:
Drawn by: JN	Checked by: KS	Scale: 1:8	E6E01
Revision #: 05	Revised by: KAB	Date: 3/13/2024	

www.tremcocpg.com



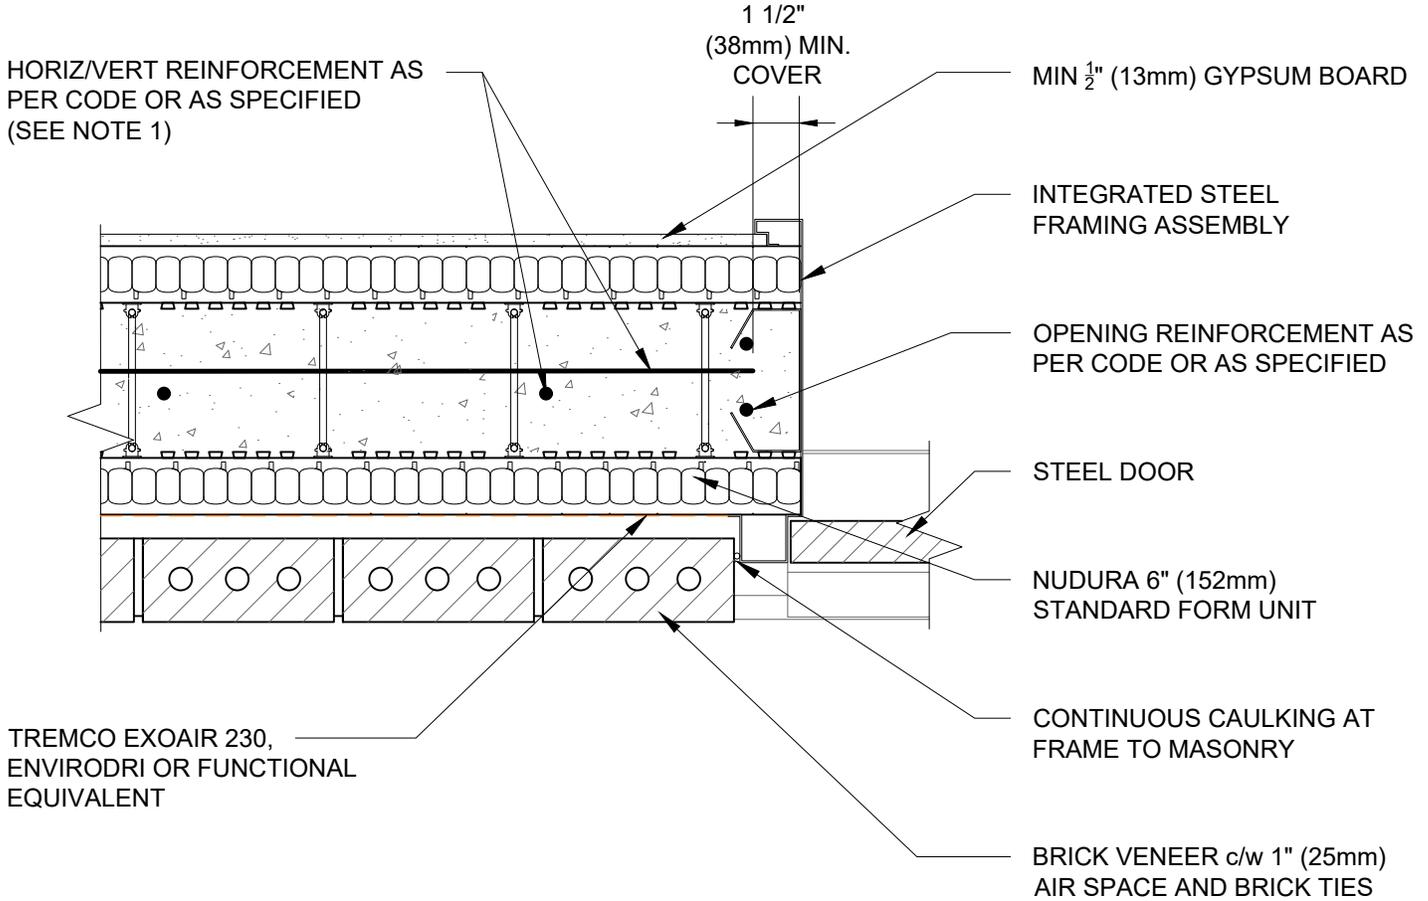

NOTES:  
 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

*This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.*


**Combustible Construction - Doors and Windows**



Detail: Nudura 6" (152mm) Form Unit, Door Jamb Detail, Brick Veneer Finish, Metal Door Frame		
Drawn by: TVC	Checked by: KS	Scale: 1:8
Revision #: 04	Revised by: KAB	Date: 3/13/2024

File Name:
E6E02



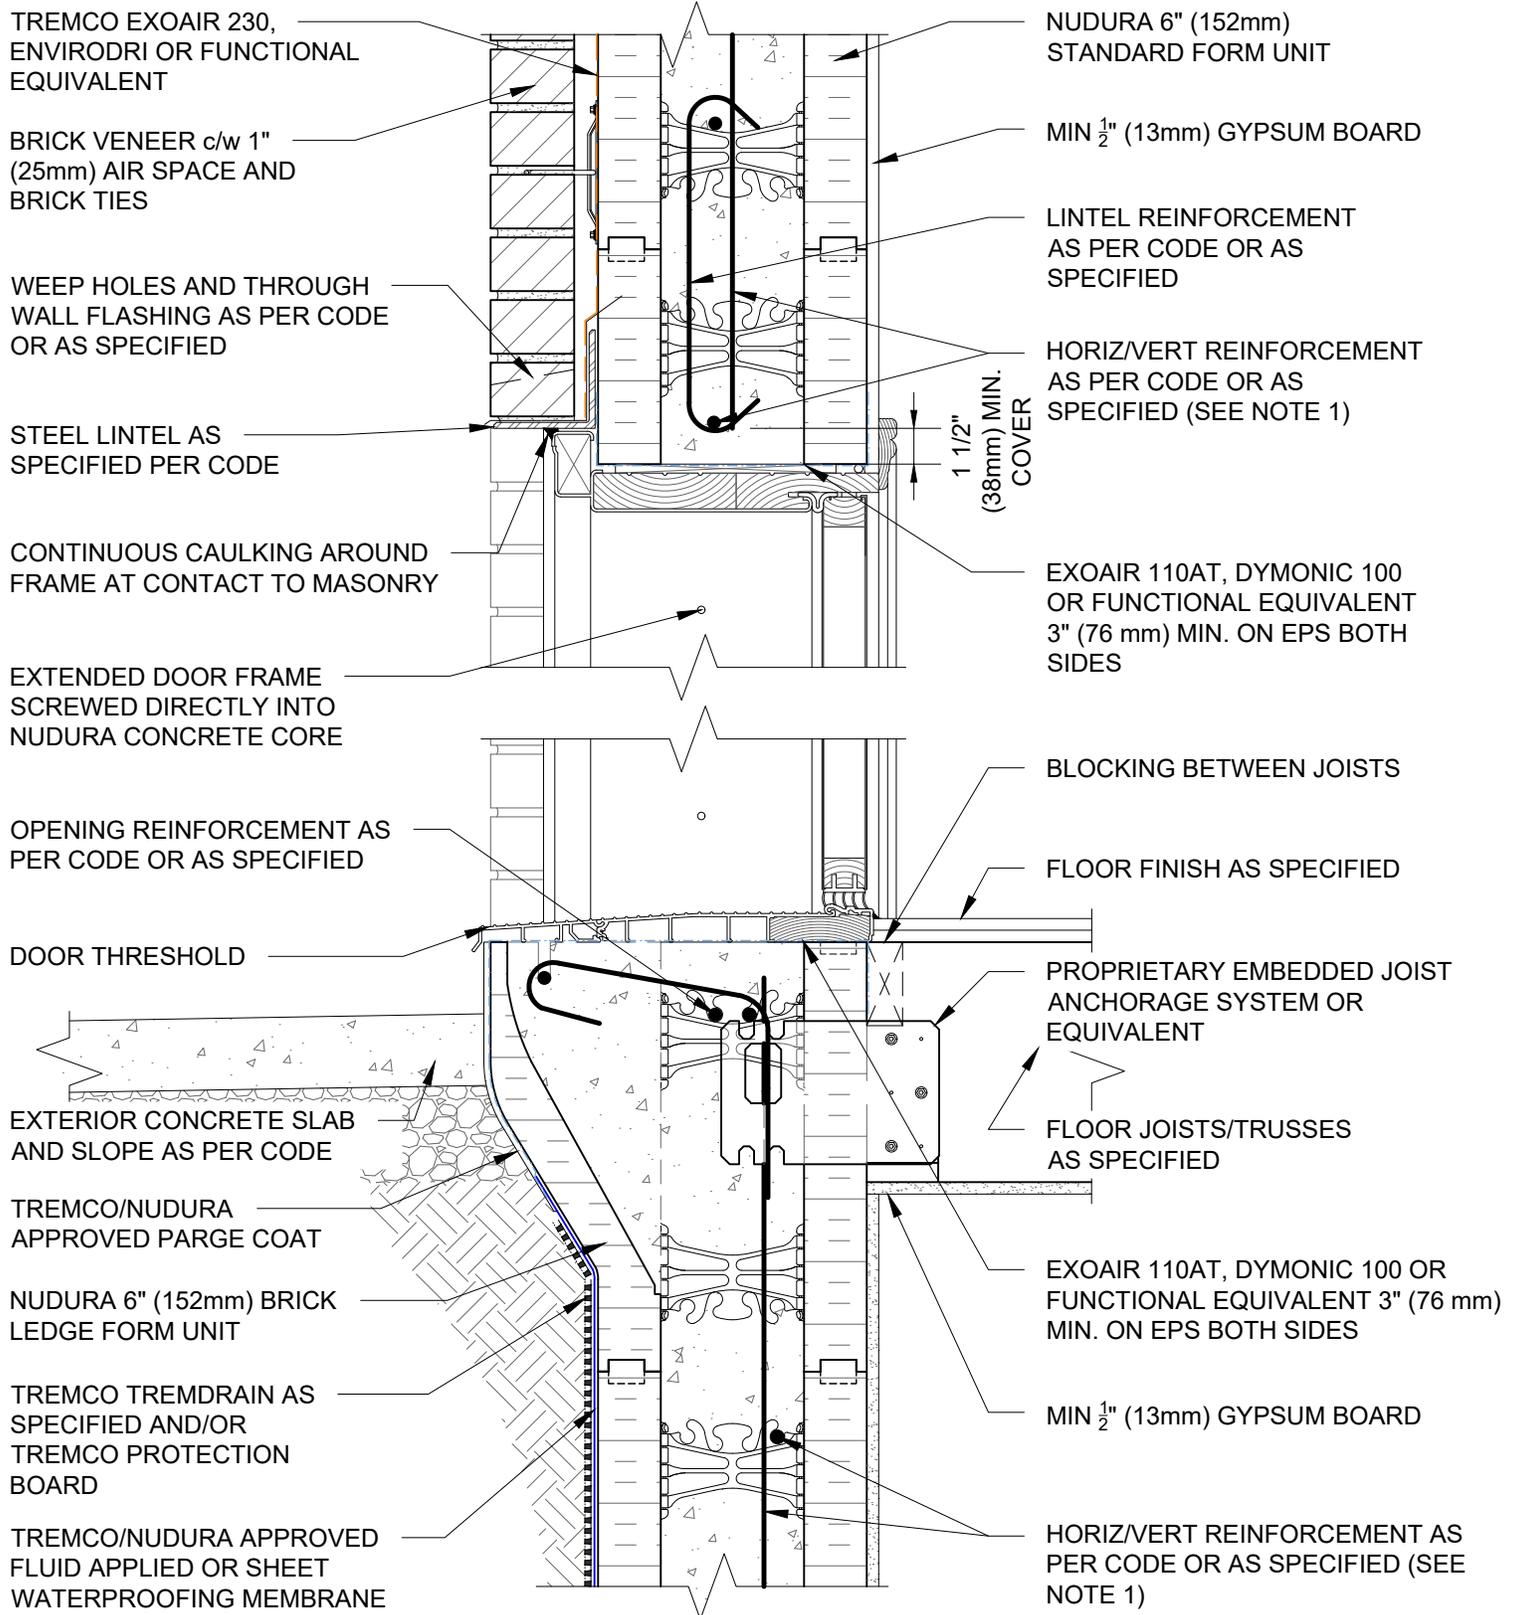

**NOTES:**  
 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

*This detail is for general informational purposes, only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.*


**Combustible Construction - Doors and Windows**



Detail: Nudura 6" (152mm) Form Unit, Door Head/Threshold Detail, Brick Veneer Finish			File Name:
Drawn by: KS	Checked by: KS	Scale: 1:8	E6E10
Revision #: 01	Revised by: KAB	Date: 3/13/2024	

www.tremcocpg.com



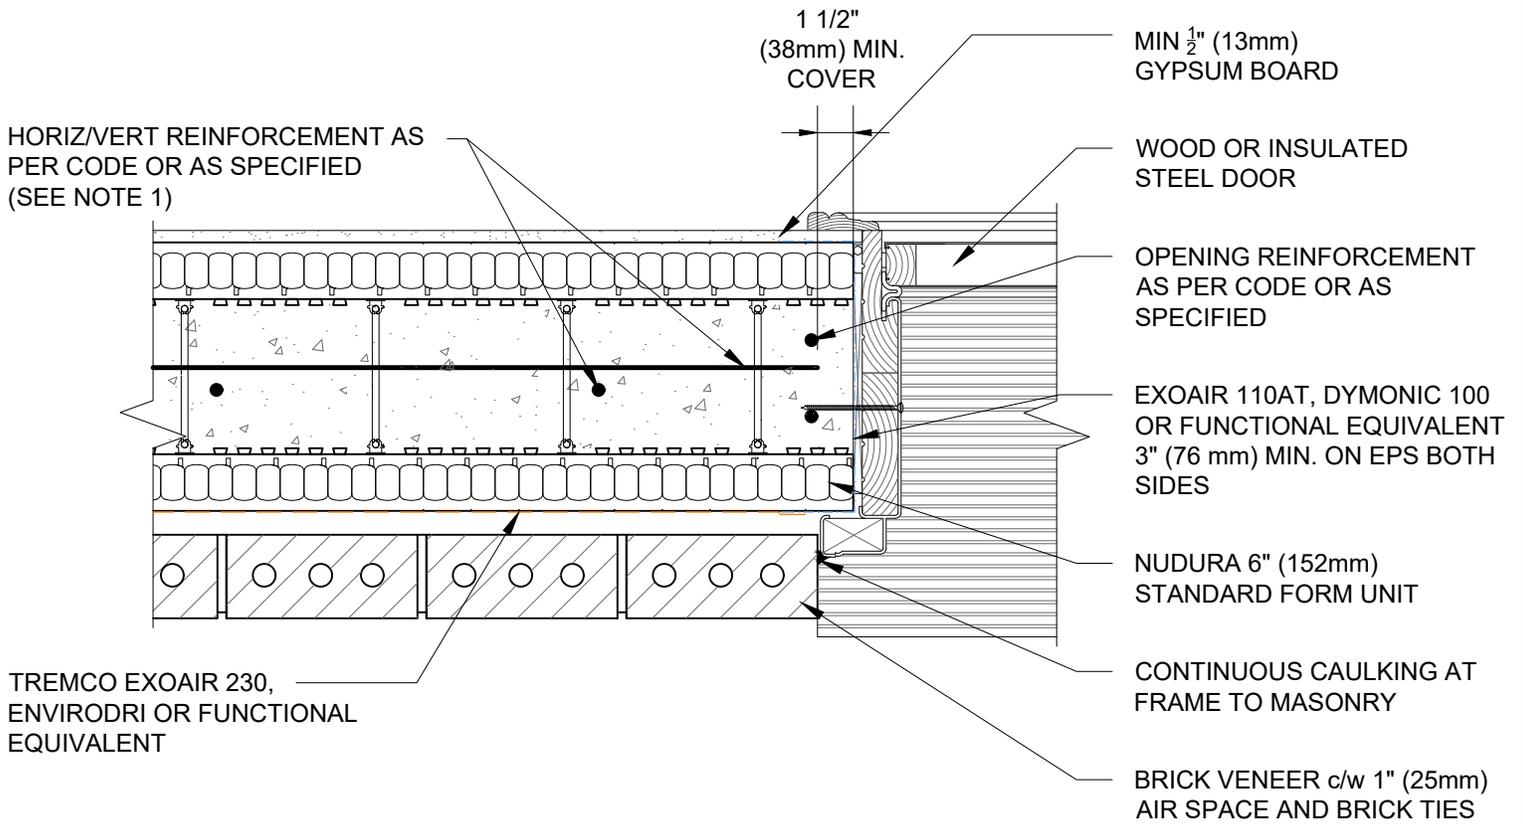

NOTES:  
 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

*This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.*


### Combustible Construction - Doors and Windows



Detail: Nudura 6" (152mm) Form Unit, Door Jamb Detail, Brick Veneer Detail		
Drawn by: KS	Checked by: KS	Scale: 1:8
Revision #: 01	Revised by: KAB	Date: 3/13/2024

File Name:  
E6E11



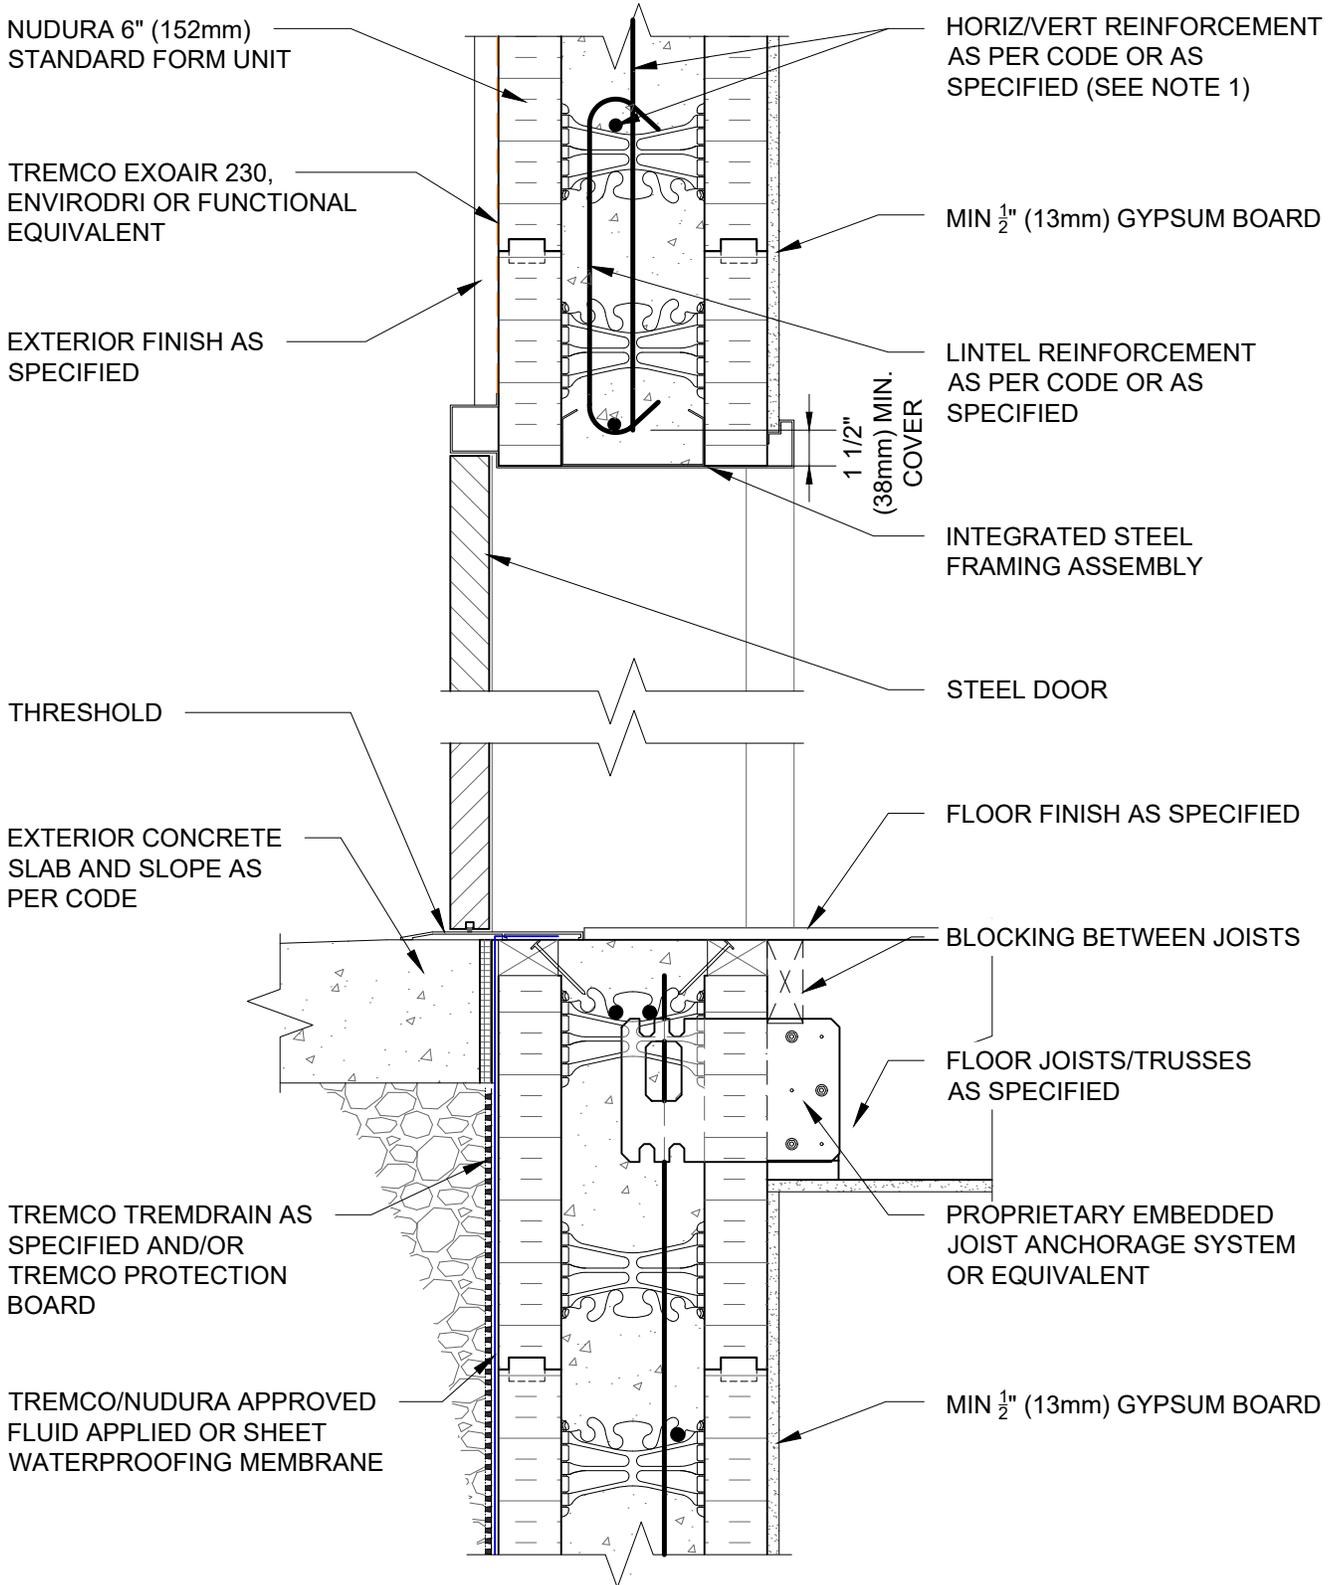

NOTES:  
 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

*This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.*


**Combustible Construction - Doors and Windows**



Detail: Nudura 6" (152mm) Form Unit, Door Head/Sill Detail, Exterior Finish as Specified, Metal Door Frame			File Name:
Drawn by: TVC	Checked by: KS	Scale: 1:8	E6G01
Revision #: 04	Revised by: KAB	Date: 3/13/2024	

www.tremcocpg.com



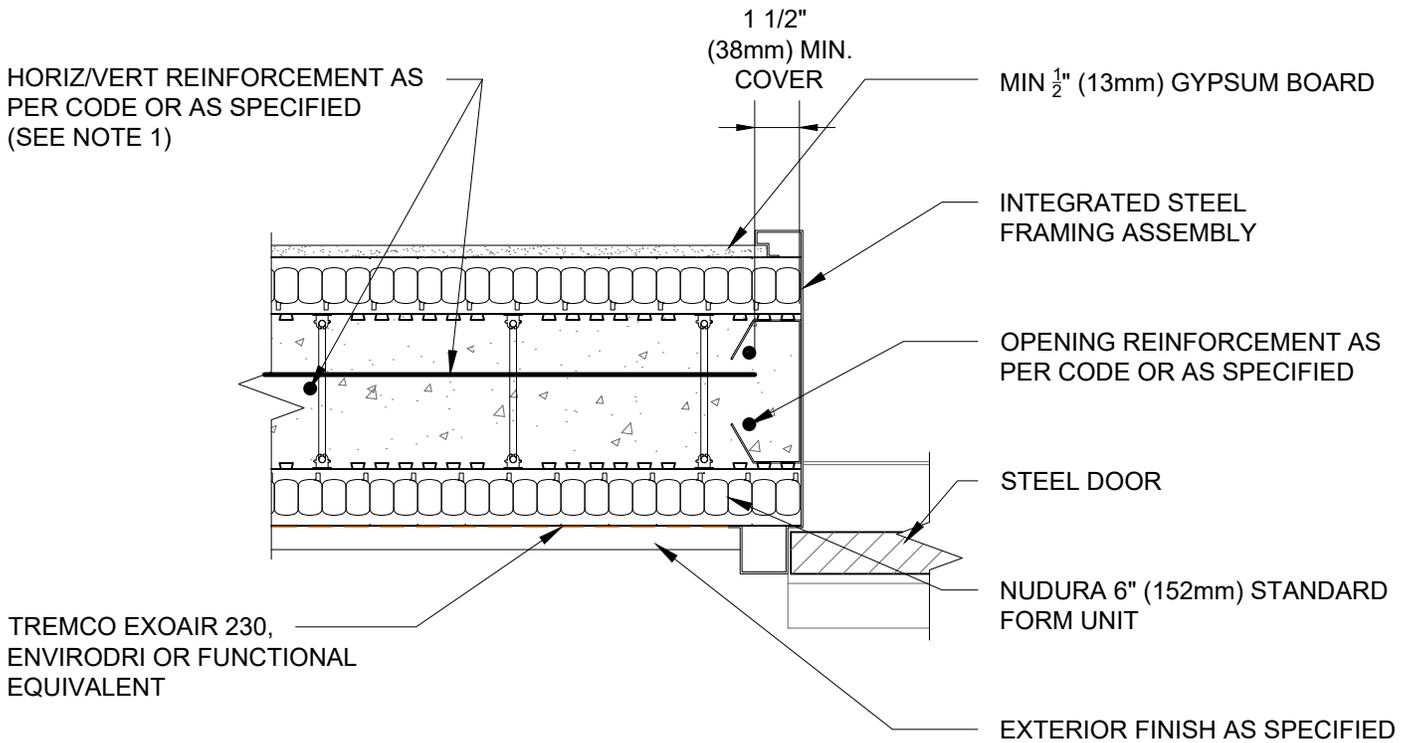

NOTES:  
 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.


*This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.*

**Combustible Construction - Doors and Windows**



Detail: Nudura 6" (152mm) Form Unit, Door Jamb Detail, Steel Door Frame, Exterior Finish as Specified			File Name:
Drawn by: JN	Checked by: KS	Scale: 1:8	E6G02
Revision #: 05	Revised by: KAB	Date: 3/13/2024	



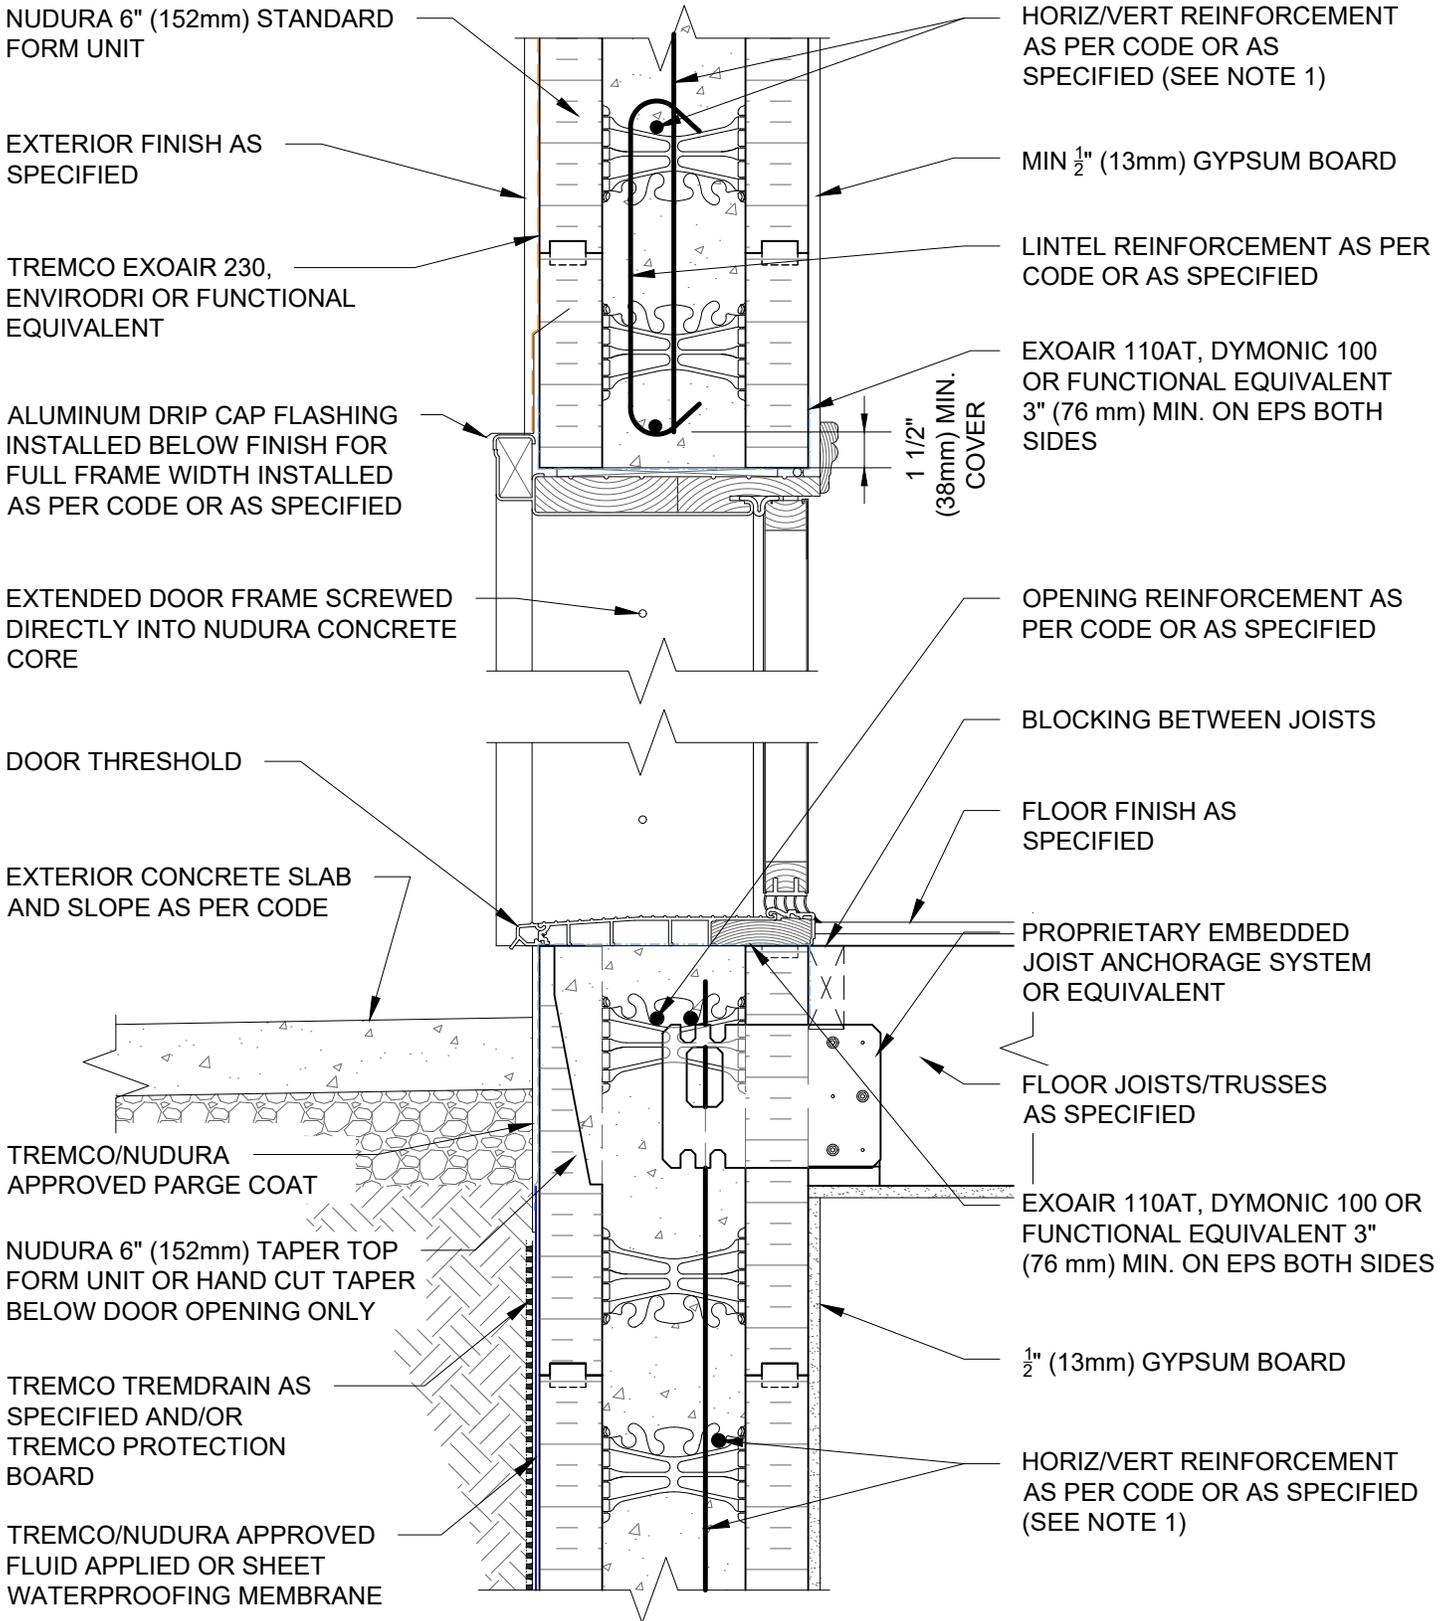

**NOTES:**  
 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

*This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.*


**Combustible Construction - Doors and Windows**



Detail: Nudura 6" (152mm) Form Unit, Door Head/Threshold Detail, Exterior Finish as Specified			File Name:
Drawn by: KS	Checked by: KS	Scale: 1:8	E6G13
Revision #: 01	Revised by: KAB	Date: 3/13/2024	

www.tremcocpg.com



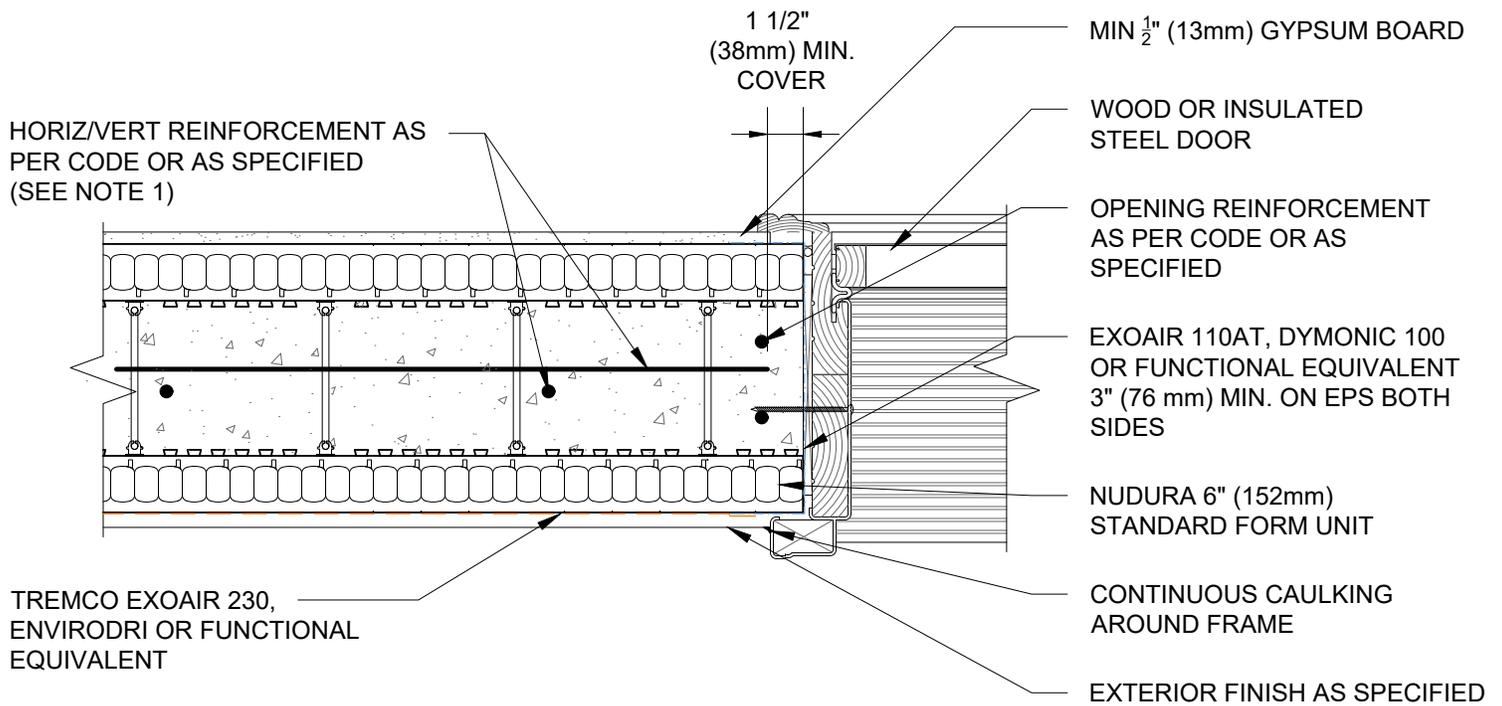

NOTES:  
 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

*This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.*

### Combustible Construction - Doors and Windows



Detail: Nudura 6" (152mm) Form Unit, Door Jamb Detail, Non-Brick Finish

File Name:

Drawn by: KS

Checked by: KS

Scale: 1:8

E6G14

Revision #: 01

Revised by: KAB

Date: 3/13/2024

