

NOTES:
 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Non-Combustible Construction - Slab on Grade

Detail: Nudura 8" (203mm) Form Unit, Stem Wall at Slab on Grade, Exterior Finish as Specified, Non-Insulated			File Name:
Drawn by: TVC	Checked by: KS	Scale: 1:8	B8C06
Revision #: 04	Revised by: KAB	Date: 3/13/2024	



NUDURA 8" (203mm)
STANDARD FORM UNIT

MIN. 1/2" (13mm) GYPSUM BOARD

TREMCO EXOAIR 230 OR
FUNCTIONAL EQUIVALENT

WET SET DOWELS TO MATCH
VERTICAL REINFORCEMENT
BETWEEN POURS OR AS
SPECIFIED


EXTERIOR FINISH
AS SPECIFIED

GRANULAR FILL

HORIZ/VERT REINFORCEMENT
AS PER CODE OR AS SPECIFIED
(SEE NOTE 1)

INSULATED CONCRETE
SLAB

TREMCO/NUDURA APPROVED
PARGE COAT

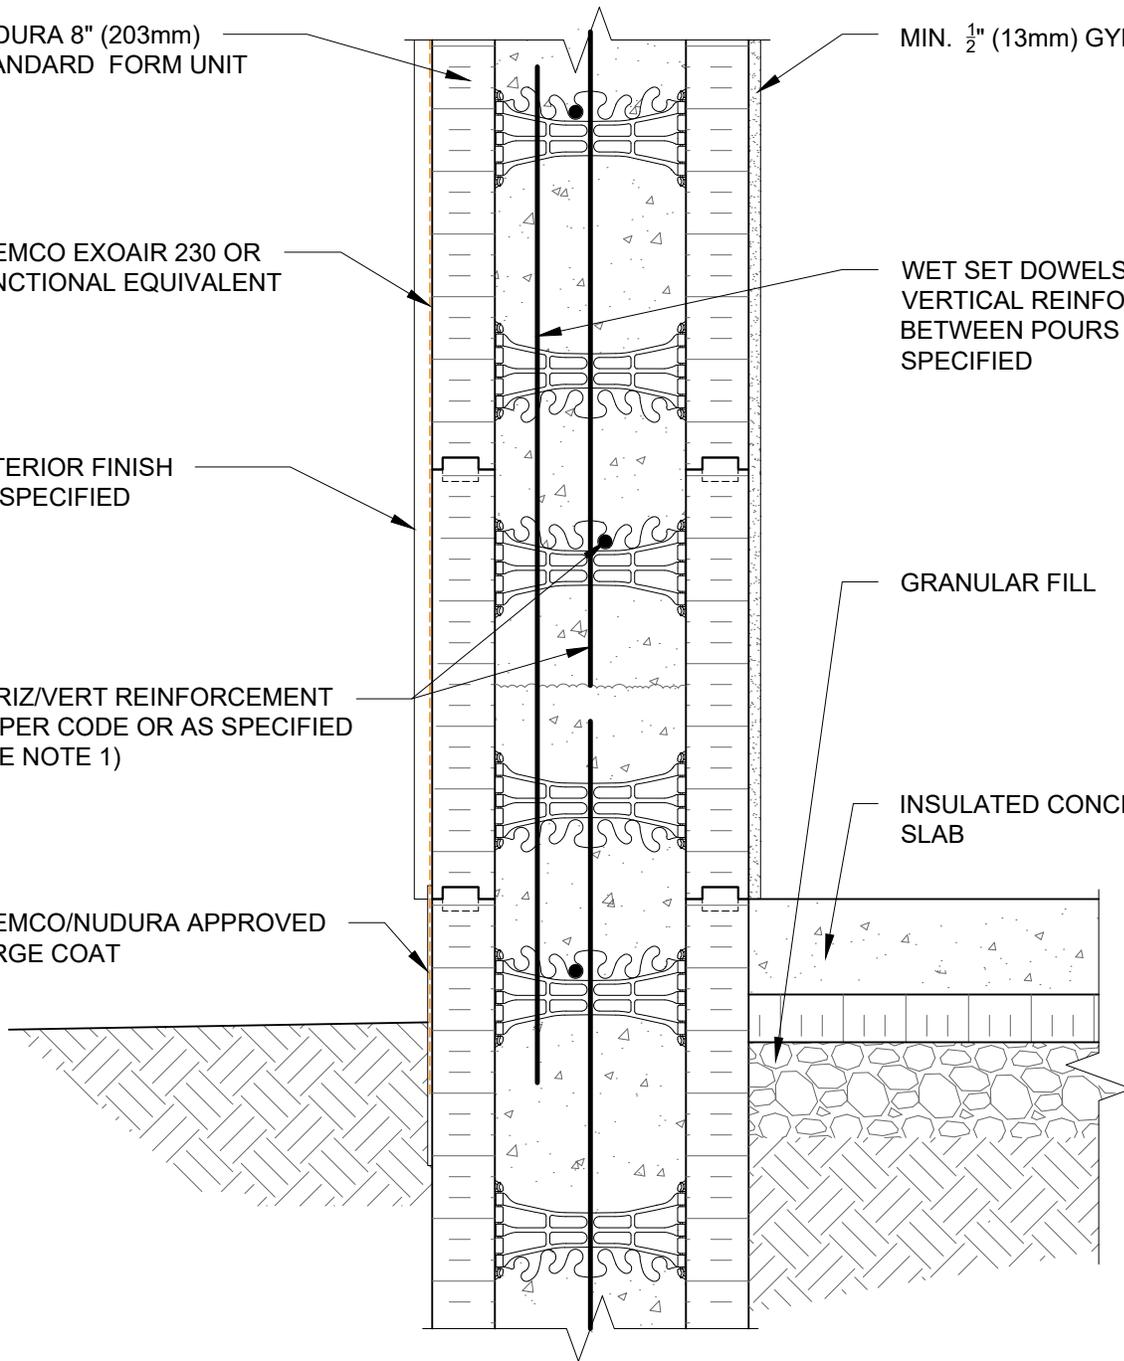

NOTES:
1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM,
SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18"
(457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT
MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT
PLACEMENT DETAILS.

This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Non-Combustible Construction - Slab on Grade



Detail: Nudura 8" (203mm) Form Unit, Stem Wall at Slab on Grade,
Exterior Finish as Specified, Insulated

File Name:

Drawn by: TVC

Checked by: KS

Scale: 1:8

B8C08

Revision #: 04

Revised by: KAB

Date: 3/13/2024

www.tremcocpg.com



NUDURA 8" (203mm)
STANDARD FORM UNIT

MIN. 1/2" (13mm) GYPSUM BOARD

TREMCO EXOAIR 230 OR
FUNCTIONAL EQUIVALENT

WET SET DOWELS TO MATCH
VERTICAL REINFORCEMENT
BETWEEN POURS OR AS
SPECIFIED

BRICK VENEER c/w
1" (25mm) AIR SPACE
AND BRICK TIES

HORIZ/VERT REINFORCEMENT
AS PER CODE OR AS
SPECIFIED (SEE NOTE 1)

GRANULAR FILL

THROUGH WALL FLASHING
AS PER CODE OR AS
SPECIFIED

INSULATED CONCRETE
SLAB

TREMCO/NUDURA APPROVED
PARGE COAT WHERE
EXTENDED ABOVE GRADE

NUDURA 8" (203mm) BRICK
LEDGE FORM UNIT

NOTES:
1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM,
SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18"
(457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT
MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT
PLACEMENT DETAILS.

This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Non-Combustible Construction - Slab on Grade



Nudura 8" (203mm) Form Unit, Stem Wall at Slab on Grade,
Brick Veneer Finish, Insulated

File Name:

Drawn by: TVC

Checked by: KS

Scale: 1:8

B8C11


Revision #: 04

Revised by: KAB

Date: 3/13/2024

www.tremcocpg.com



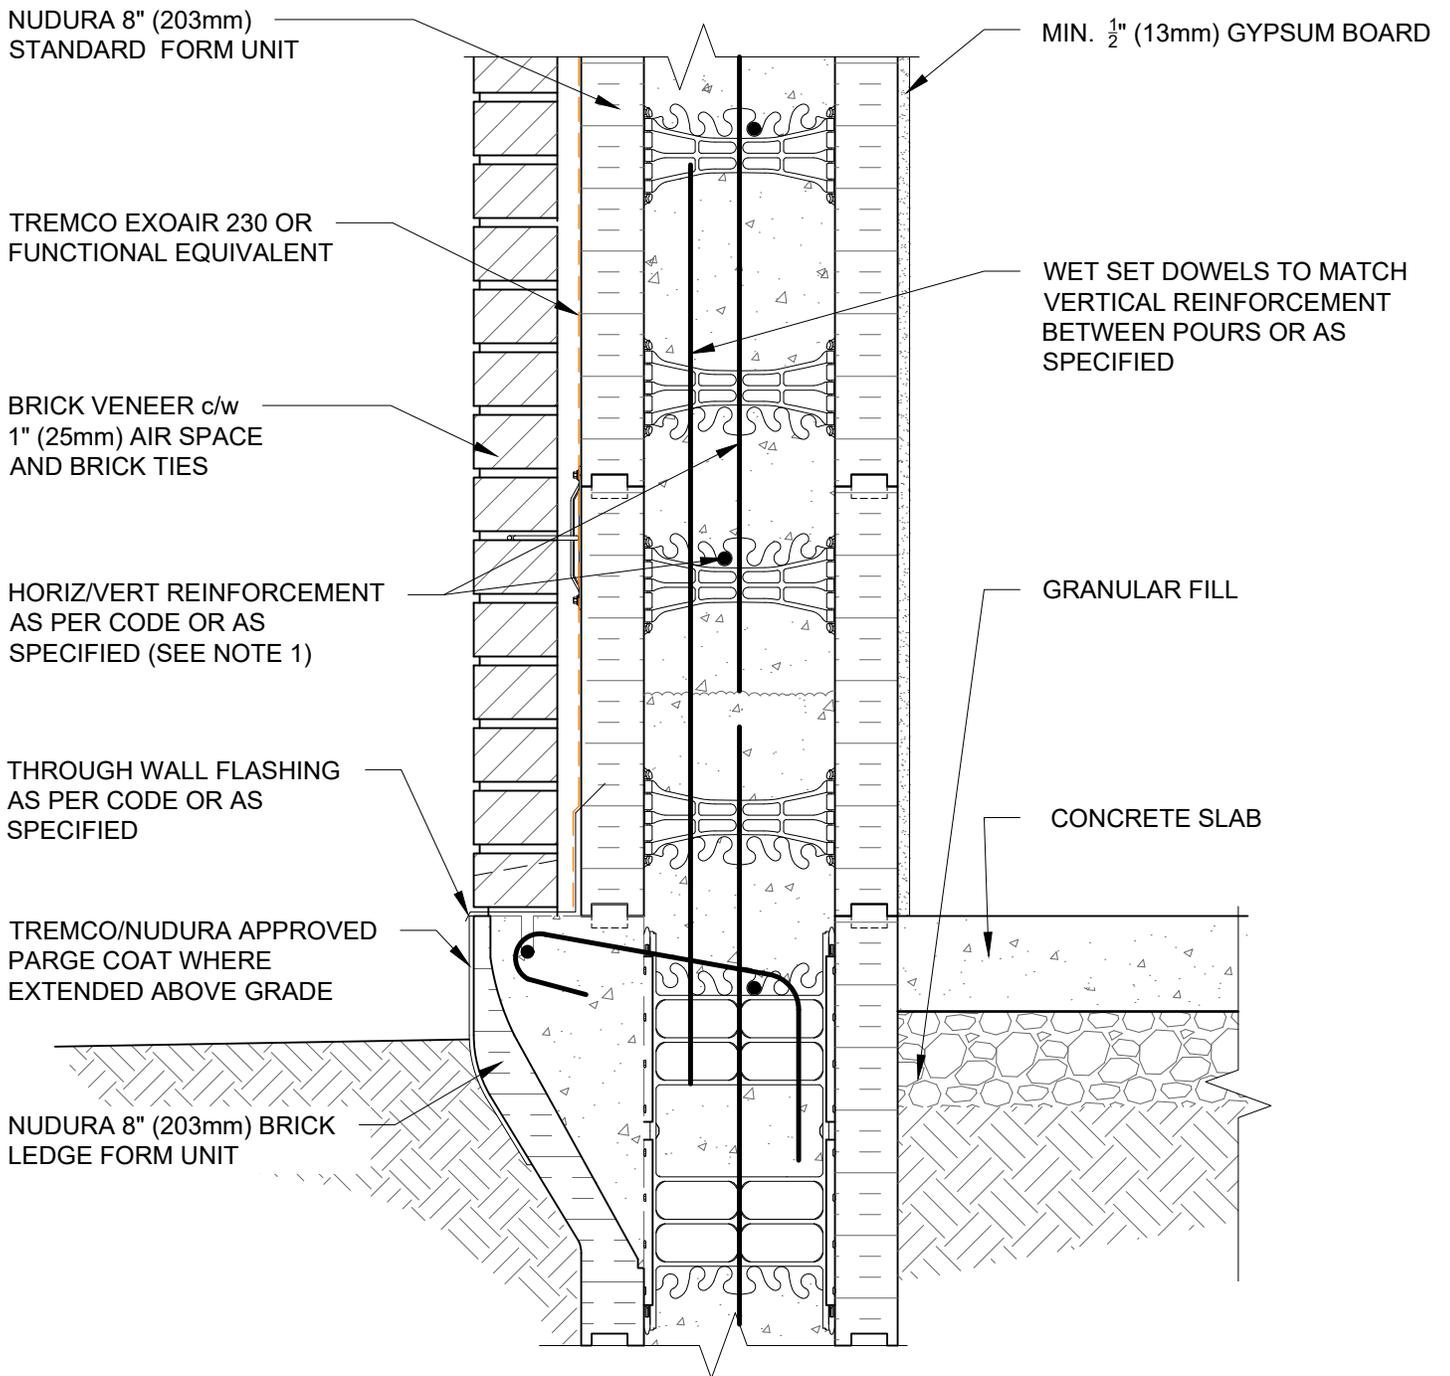

NOTES:
 1) FOR OPTIMAL REINFORCEMENT PLACEMENT IN THE NUDURA FORM, SPACING OF HORIZONTAL REINFORCEMENT TO BE SPECIFIED AT 18" (457mm) O.C. AND VERTICAL REINFORCEMENT TO BE SPECIFIED AT MULTIPLES OF 8" (203mm) O.C. REFER TO NUDURA REINFORCEMENT PLACEMENT DETAILS.

This detail is for general informational purposes only. The project design professional determines, in its sole discretion, whether this detail or a functionally equivalent detail is best suited for the project with respect to any architecture, engineering, and design requirements, including any local building code requirements. If this document is not reviewed and the product is not approved for use by a licensed design professional, the customer agrees that the detail may contain substantive flaws requiring correction, and hereby releases Tremco CPG Inc. from any and all liability related to the design and installation of the product. This detail is subject to change without notice. Contact Tremco to ensure you have the most recent version.

Non-Combustible Construction - Slab on Grade



Detail: Nudura 8" (203mm) Form Unit, Stem Wall at Slab on Grade, Brick Veneer Finish, Non-Insulated			File Name:
Drawn by: TVC	Checked by: KS	Scale: 1:8	B8C12
Revision #: 04	Revised by: KAB	Date: 3/13/2024	

www.tremcocpg.com

