

# Nudura

## 4-WAY WEB CONNECTOR




### PRODUCT INFORMATION SHEET

#### Product Code

NUS-A4XWC-00

#### Product Description

Nudura's 4-Way Web Connector is designed to securely join two or more of Nudura's insert webs to build larger concrete form widths required. The 4-Way Web Connector can also be used to connect four insert webs together when building a pilaster in a wall. Nudura's insert webs are available in widths of 4" (102 mm), 6" (152 mm), 8" (203 mm), 10" (254 mm), and 12" (305 mm) allowing forms to be constructed as large as a 24" (610 mm) concrete core using two 12" (305 mm) insert webs. Larger form widths can be achieved by using multiple 4-Way Web Connectors.

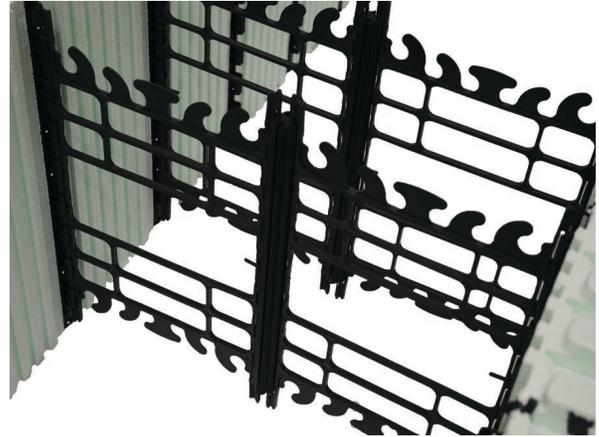

#### Basic Uses

The 4-Way Web Connector is used to join two or more insert webs together to achieve a larger concrete core width form than what is available in the standard Nudura form lineup. The 4-Way Web Connector can also be used to connect four insert webs together when building a pilaster in a wall.

#### Packaging

Nudura's 4-Way Web Connectors are packaged 100 pieces in a durable, clear plastic bag.

Bag Length: 12" (305 mm)

Bag Width: 9" (229 mm)

Bag Height: 14" (356 mm)

Bag Weight: 15 lbs (7 kg)

#### Storage

Store the 4-Way Web Connectors in their original, undamaged packaging in a clean, dry location.

# Nudura

## 4-WAY WEB CONNECTOR



### Estimating

To estimate the quantity of 4-Way Web Connectors (4XWC) required for a specific project, begin by determining the linear feet (linear meters) of the perimeter of the structure and divide it by the length of a standard form (8' (2.44 m)). Multiply this by 12 and then multiply it again by the number of courses in the wall height.

### Imperial Calculation

$4XWC = ((LPER \div 8') \times 12) \times \# \text{ of courses}$

### Metric calculation

$4XWC = ((LMPER \div 2.44 \text{ m}) \times 12) \times \# \text{ of courses}$

Watch our accessory videos on [Nudura's YouTube Channel](#)

This information is offered in good faith based on data available to us that we believe to be true and accurate. However, no warranty of merchantability, fitness for any particular purpose, or any other warranty is expressed or is to be implied regarding the accuracy or completeness of this information, the results to be obtained from the use of this information or the product, the safety of this product, or the hazards related to its use. The information provided herein, and the product, are furnished on the condition that the person receiving them shall make their own determination as to the suitability of the product for their particular purpose and on the condition that they assume the risk of their use. The manufacturer, supplier, nor any of its subsidiaries assumes any liability whatsoever for any damage or injury resulting from abnormal use or from any failure to adhere to recommended practices.

Nudura Inc., June 2020