

BRICK VENEER c/w 1" (25mm) AIR SPACE AND BRICK TIES

FORM PANELS c/w INSERT WEBS—CUT TO SUIT FLOOR CONNECTION— ADDITIONAL FORM SUPPORT AS REQUIRED

WET SET DOWELS FIELD BENT INTO SLAB AS SPECIFIED

U BRACKET ANCHOR INSERT

WET SET DOWELS TO MATCH VERTICAL REINFORCEMENT BETWEEN POUR OR AS SPECIFIED

HORIZ/VERT REINFORCEMENT AS PER CODE OR AS SPECIFIED

NUDURA 10" (254mm) STANDARD FORM UNIT


GYPSUM BOARD FINISHED/FIRE STOP INSTALLED AT JOISTS AS PER CODE

COMPOSITE STEEL DECK—SLAB AND REINFORCEMENT AS SPECIFIED

OWSJ

INTERIOR INSULATION REMOVED AT JOIST LOCATIONS

1/2" (13mm) GYPSUM BOARD

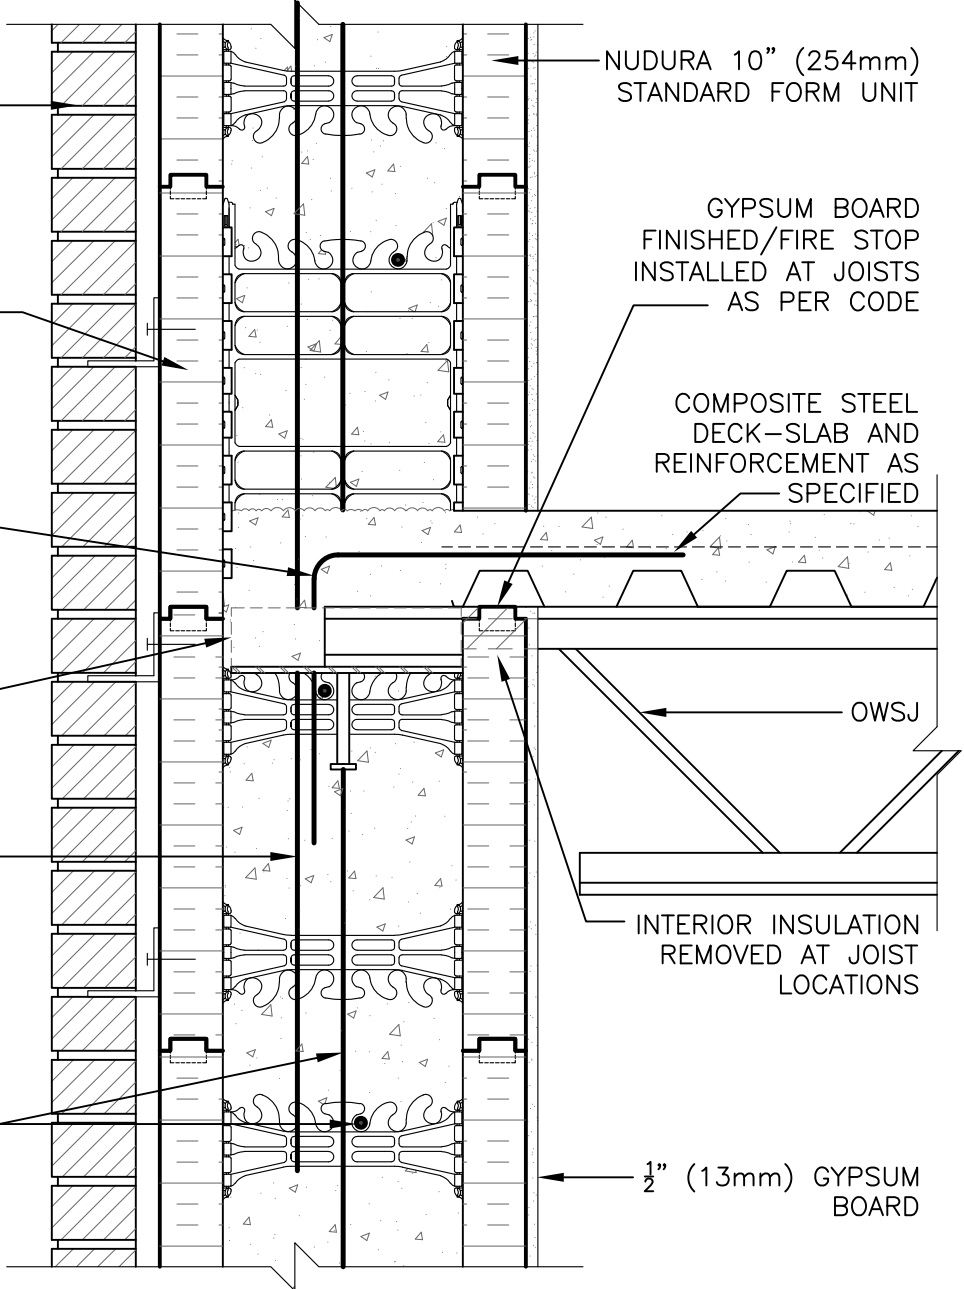

DISCLAIMER NOTICE:
 SPECIFIC INFORMATION
 REQUIRED FOR COMPLIANCE
 WITH LOCAL CODES IS THE
 RESPONSIBILITY OF THE
 DESIGNER



NUDURA 10" (254mm) FORM UNIT
 COMPOSITE STEEL DECK—SLAB
 STEEL JOIST ON EXT. BEARING WALL
 INTERMEDIATE FLOOR CONNECTION
 BRICK VENEER FINISH

REV. NO. 004 KS	DWG NO. D10C08
REV. DATE: MAR 2010	
DRAWN BY: T. VAN CLIEAF	SCALE: 1 : 8