

NUDURA 10" (254mm)
STANDARD FORM UNIT

BRICK VENEER c/w
1" (25mm) AIR
SPACE AND BRICK
TIES

WET SET DOWELS TO
MATCH VERTICAL
REINFORCEMENT
BETWEEN POURS OR
AS SPECIFIED

FORM PANELS c/w
INSERT WEBS-CUT TO
SUIT FLOOR
CONNECTION-ADDITIONAL
FORM SUPPORT AS
REQUIRED

THROUGH WALL
FLASHING AS PER CODE
OR AS SPECIFIED

NUDURA 10" (254mm)
BRICK LEDGE FORM
UNIT

$\frac{3}{16}$ " (5mm) ACRYLIC PARGE
COAT

NUDURA WATERPROOF
MEMBRANE

$\frac{1}{2}$ " (13mm) GYPSUM
BOARD


HORIZ/VERT
REINFORCEMENT AS
PER CODE OR AS
SPECIFIED

CAST IN PLACE
CONCRETE FLAT
SLAB

FINISH AS SPECIFIED

DOWELS FIELD BENT
INTO SLAB AS
SPECIFIED

$\frac{1}{2}$ " (13mm) GYPSUM
BOARD

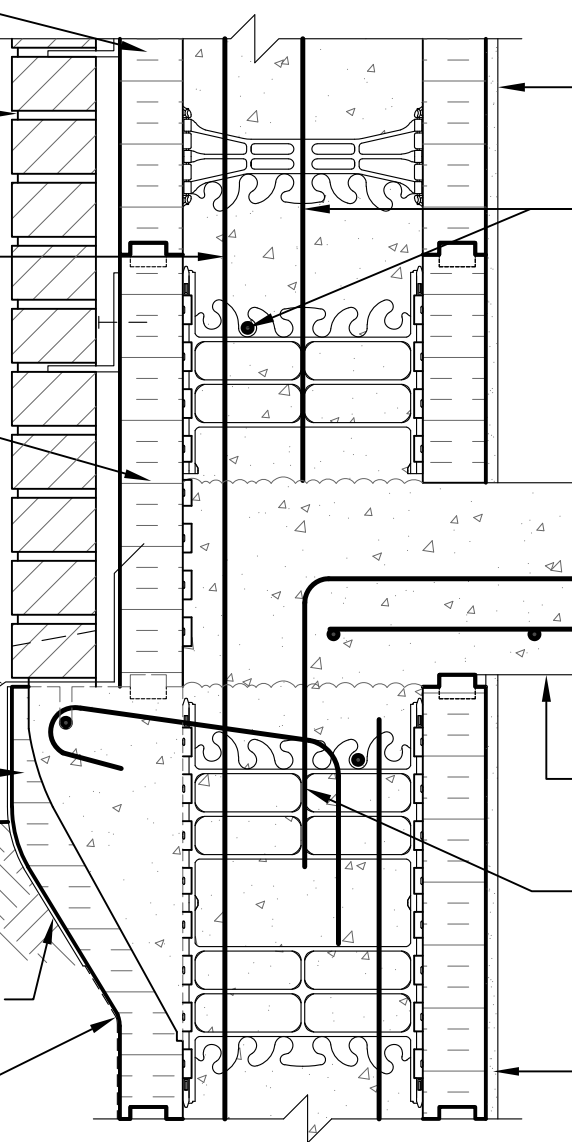

DISCLAIMER NOTICE:
SPECIFIC INFORMATION
REQUIRED FOR COMPLIANCE
WITH LOCAL CODES IS THE
RESPONSIBILITY OF THE
DESIGNER



NUDURA

INTEGRATED BUILDING TECHNOLOGY

Building Value.

NUDURA 10" (254mm)
BRICK LEDGE FORM UNIT
CONCRETE FLAT PLATE
BEARING WALL DETAIL
BRICK VENEER FINISH

REV. NO. 000	DWG NO. D10E01
DATE: APRIL 2010	
DRAWN BY: K. STILL	SCALE: 1 : 8

DWG NO. D10E01
SCALE: 1 : 8